

10/26/00
JC853 U.S. PTO

10-27-00
A
LIMBACH & LIMBACH L.L.P.
2001 Ferry Building, San Francisco, CA 94111
415/433-4150

Address to:
Box Patent Application
Commissioner for Patents
Washington, D.C. 20231

Attorney's Docket No. SONY-U0361

First Named Inventor HARUO OBA

Jc714 U.S. PTO
09/696927
10/26/00

UTILITY PATENT APPLICATION TRANSMITTAL
(under 37 CFR 1.53(b))

SIR:

Transmitted herewith for filing is the patent application entitled:
**AUTHENTICATION INFORMATION COMMUNICATION SYSTEM AND METHOD, PORTABLE
INFORMATION PROCESSING DEVICE AND PROGRAM FURNISHING MEDIUM**

CERTIFICATION UNDER 37 CFR § 1.10

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date October 26, 2000, in an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number EL254113902US addressed to: Box Patent Application, Commissioner for Patents, Washington, D.C. 20231.

Joan Mazzeo

(Name of person mailing paper)

[Signature]
(Signature)

Enclosed are:

1. X Transmittal Form (two copies required)
2. The papers required for filing date under CFR § 1.53(b):
 - i. 64 Pages of specification (including claims and abstract);
 - ii. 16 Sheets of drawings.
 formal x informal
3. Declaration or oath
 - a. x Unsigned - Combined with Power of Attorney

ACCOMPANYING APPLICATION PARTS

4. An assignment of the invention to Sony Corporation is attached (including Form PTO-1595).
 - i. 37 CFR 3.73(b) Statement (when there is an assignee)
5. x Power of Attorney - Unsigned - Combined with Declaration
6. An Information Disclosure Statement (IDS) is enclosed, including a PTO-1449 and copies of references.
7. x Preliminary Amendment.
8. X Return Receipt Postcard (MPEP 503 -- should be specifically itemized)
9. FOREIGN PRIORITY
 - [x] Priority of application nos. P11-310517 and P2000-253305 filed on November 1, 1999 and August 24, 2000; respectively in Japan are claimed under 35 USC 119.

The certified copy of the priority application:

- is filed herewith; or
- has been filed in prior application no. filed on , or
- x will be provided.

 English Translation Document (if applicable)

10. FEE CALCULATION

- a. ☐ Amendment changing number of claims or deleting multiple dependencies is enclosed.

CLAIMS AS FILED

	Number Filed	Number Extra	Rate	Basic Fee (\$710)
Total Claims	24 - 20	* 4	x \$18.00	72.00
Independent Claims	5 - 3	* 2	x \$80.00	160.00
<input type="checkbox"/> Multiple dependent claim(s), if any			\$270.00	0

*If less than zero, enter "0".

Filing Fee Calculation \$942.00

50% Filing Fee Reduction (if applicable) \$

11. Small Entity Status

- a. ☐ A small entity statement is enclosed.
b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
c. ☐ is no longer claimed.

12. Other Fees

- ☐ Recording Assignment [\$40.00] \$0
☐ Other fees
Specify _____ \$0

Total Fees Enclosed \$942.00

13. Payment of Fees

- ☒ Check(s) in the amount of \$ 942.00 enclosed.
☐ Charge Account No. 12-1420 in the amount of \$ ____.
A duplicate of this transmittal is attached.

14. All correspondence regarding this application should be forwarded to the undersigned attorney:

Charles P. Sammut
Limbach & Limbach L.L.P.
2001 Ferry Building
San Francisco, CA 94111
Telephone: 415/433-4150
Facsimile: 415/433-8716


15. Authorization to Charge Additional Fees

- ☒ The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1.16 or § 1.17 to Account No. 12-1420. **A duplicate of this transmittal is attached.**

LIMBACH & LIMBACH L.L.P.

October 26, 2000
(Date)

Attorney Docket No. SONY-U0361
[SOOP1361US00]

By: 
Charles P. Sammut
Registration No. 28,901
Attorney(s) or Agent(s) for Applicant(s)

PATENT

-1-

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of)	Group Art Unit: Unknown
)	
HARUO OBA ET AL.)	Examiner: Unknown
)	
Application No. Not Assigned)	<u>PRELIMINARY AMENDMENT</u>
)	
Filed: Herewith)	2001 Ferry Bldg.
)	San Francisco, CA 94111
For: AUTHENTICATION)	Ph.: 415-433-4150
INFORMATION)	
COMMUNICATION SYSTEM)	
AND METHOD, PORTABLE)	
INFORMATION)	
PROCESSING DEVICE AND)	
PROGRAM FURNISHING)	
MEDIUM)	
)	
)	
)	

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination of the above-identified application, please enter
the following amendments:

In the Specification

Page 16, line 18, please change "Fig. 2 is a graph" to

--Figs. 2A and 2B are graphs--;

Page 16, the penultimate line, please change "Fig. 3 is a graph" to

--Figs. 3A and 3B are graphs--;

Page 17, line 7, please change "Fig. 6 illustrates" to

--Figs. 6A, 6B, 6C and 6D illustrate--;

Page 17, line 16, please change "Fig. 10 illustrates" to

--Figs. 10A and 10B illustrate--;

Page 20, line 12, please change "Fig. 2 shows" to

--Figs. 2A and 2B show--;

Page 21, line 16, please change "Fig. 3 shows" to

--Figs. 3A and 3B show--;

Page 32, the last line, please change "Fig. 6 shows" to

--Figs. 6A, 6B, 6C and 6D show--;

REMARKS


The amendments to the specification and drawings are to conform the drawings to the specification, to conform the specification to the drawings and/or correct typographical errors. It is respectfully submitted that such amendments are supported by the specification, claims, abstract of the disclosure and the drawings.

The Examiner's early examination and consideration are respectfully requested.

Respectfully submitted,

LIMBACH & LIMBACH L.L.P.

By:



Charles P. Sammut
Reg. No. 28,901

October 26, 2000
Our File: SONY-U0361

PATENT

-1-

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of) Group Art Unit: Unknown
)
HARUO OBA ET AL.) Examiner: Unknown
)
Application No. Not Assigned) PRELIMINARY AMENDMENT
)
Filed: Herewith) 2001 Ferry Bldg.
) San Francisco, CA 94111
For: AUTHENTICATION) Ph.: 415-433-4150
INFORMATION)
COMMUNICATION SYSTEM)
AND METHOD, PORTABLE)
INFORMATION)
PROCESSING DEVICE AND)
PROGRAM FURNISHING)
MEDIUM)
_____))

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination of the above-identified application, please enter
the following amendments:

In the Specification

Page 16, line 18, please change "Fig. 2 is a graph" to

--Figs. 2A and 2B are graphs--;

Page 16, the penultimate line, please change "Fig. 3 is a graph" to

--Figs. 3A and 3B are graphs--;

Page 17, line 7, please change "Fig. 6 illustrates" to

--Figs. 6A, 6B, 6C and 6D illustrate--;

Page 17, line 16, please change "Fig. 10 illustrates" to

--Figs. 10A and 10B illustrate--;

Page 20, line 12, please change "Fig. 2 shows" to

--Figs. 2A and 2B show--;

Page 21, line 16, please change "Fig. 3 shows" to

--Figs. 3A and 3B show--;

Page 32, the last line, please change "Fig. 6 shows" to

--Figs. 6A, 6B, 6C and 6D show--;

REMARKS


The amendments to the specification and drawings are to conform the drawings to the specification, to conform the specification to the drawings and/or correct typographical errors. It is respectfully submitted that such amendments are supported by the specification, claims, abstract of the disclosure and the drawings.

The Examiner's early examination and consideration are respectfully requested.

Respectfully submitted,

LIMBACH & LIMBACH L.L.P.

By:



Charles P. Sammut
Reg. No. 28,901

October 26, 2000
Our File: SONY-U0361

TITLE OF THE INVENTION

Authentication Information Communication System and Method, Portable Information Processing Device and Program Furnishing Medium

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to an authentication information communication system and method, portable information processing device and a program furnishing medium. More particularly, it relates to a personal authentication information communication system and a personal authentication information communication method which enables data communication with a portable equipment having a contact as an electrode carried by a human body by a portion of a human body, e.g., a hand, contacting another contact, similarly as an electrode, provided on an external equipment to transmit data necessary for personal authentication through the human body to enable personal authentication processing and information exchange with an external equipment. The portable equipment, to which the present invention is applied, is realized by a small-sized article usually worn by a user and which has a curved fitting portion, such as a timepiece or a ring, such that data for personal authentication is stored in this type of the personal accessories.

Description of Related Art

There has hitherto been known a system in which personal authentication is performed using a non-contact card to control an external equipment based on the

result of authentication (see, for example, Japanese Laying-Open Patent H-11-161763). The non-contact card is one of the configurations felt to be promising as an effective technique as a system which possibly takes the place of a commutation ticket or a pre-paid card.

However, a user of this non-contact card to be authenticated by this card has to take the card itself by hand and to approach it to an information reader, such as a sensor, in order to get the read-out processing executed. Each of these processing operations is time-consuming. For example, if a series of operations has to be executed one-by-one within limited time, as when the user passes through an entrance gate or a wicket gate, the card reading for personal authentication, authentication processing based on the read-out data and gate opening/closing operations based on the results of the authentication processing need to be performed in succession for plural users. If the processing time per user is increased, the processing time for many users is correspondingly increased to render the realization difficult. In this meaning, the non-contact card cannot be the to be superior in all aspects to the conventional contact type card.

Moreover, a user exploiting the non-contact card or a portable equipment for authentication other than the card type is required to execute an extremely ambiguous processing operation such as causing the authentication equipment, such as a card, worn or taken out by the user, to approach to or to pass by the authentication equipment or the processing device, without the processing of directly contacting the

authentication equipment with the authentication or processing device. So, the user cannot feel that data readout has succeeded or the personal authentication processing is being carried out, such that the user cannot discern e.g., the processing start timing. Since the user cannot check as to whether or not the processing is being carried out, there may be produced an error such as a gate not being opened after a pre-set time, while there is not obtained the result of failure in readout processing or in authentication until such error is actually produced.

In view of the above depicted status of the prior art, the present invention provides a system and a method for personal authentication information communication in which personal authentication is executed in the same way as in the conventional contact card or in the non-contact card. A user desirous to undergo personal authentication contacts a portion of his or her body, such as a finger or a palm, with a contact provided in an equipment constituting the authentication system to transfer data for personal authentication through the body of the user. Thus, the start of the processing for personal authentication can be recognized by no other than the user to improve the ease with which the personal authentication processing system is used. Moreover, the user may feel physically that the authentication processing and the variety of processing operations have actually been initiated based on the authentication processing.

As prior-art techniques showing the above-described system of transmitting data through a human body, there are, for example, the following techniques:

In the Japanese Laying-Open Patent H-7-170215 and US Patent 5,914,701, there is disclosed such a configuration in which, in two separate systems, each having an electrode, electric waves which, unless modified, are not sufficient in intensity to permit communication, are transmitted between the systems, so that data transfer between the systems occurs with a human body interposed therebetween as a medium for transmission. For example, the Japanese Laying-Open Patent H-7-170215 shows a configuration in which audio/video signals are transmitted through an electrically conductive member and the human body so as to be output to a reception terminal provided with a display and a loudspeaker.

In the US Patent 5,796,827, there is disclosed a concept in a system for data transmission through human body in which means are additionally provided for transmitting/receiving encrypted data for application of the system to e.g., a credit card or a cash card. Specifically, this configuration is such a one in which encoded data is transmitted from a transmitter to a receiver through a human body as a medium for transmission and in which an authentication processing device connected to the receiver processes and authenticates the encoded data transmitted through the human body. The US Patent shows a configuration in which an electrode for realizing data transmission through the human body can be built into an article routinely worn by the user, such as a wrist-watch, apparel or shoe. By having the electrode fitted on an article routinely worn by the user, that is items of personal accessories, it is unnecessary to have a dedicated electrode constituting item worn by the user.

However, service types have recently been diversified, such that, in many cases, the processing types executed after authentication processing are desirably made to differ depending on the place and the time or from user to user. If the user is identified by authentication processing to unanimously execute the processing depending on the result of the authentication, the contents of the services offered are undesirably fixed and invariable. If, when users A and B, desirous to acquire the BGM at a service furnishing terminal executing the information purveying services, are fans of classic music and rock music, respectively, and the music information is distributed based merely on the authentication processing, the music information distributed may not be in meeting with the liking of the user. Alternatively, if the service furnishing terminal is such a one adapted for controlling the opening/closing of an entrance gate of a recreation park, it is desirable to set the proper time and place for gate opening/closure from one user to another.

It is of course possible to provide a table adapted for setting the services presented from user to user and to determine the service to be furnished based on the user ID to execute the so-determined services, the data processing, that is data transmission from the information furnishing terminal to the CPU. However, such data processing, that is data transfer in the data processing device, decision of the processing mode or data transfer from the information furnishing terminal to the CPU, data processing in the data processing device, decision of the processing mode or data transmission to the information furnishing device, is time-consuming, such that the

delay caused in the processing is accumulated in an environment in which processing for different users has to be carried out in succession.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide such a configuration in which, for enabling instantaneous execution of the processing operations under modes different from user to user or from service to service, authentication data independent from service to service and unique from user to user are prepared and stored in a portable equipment of a user to enable authentication data to be output on service request.

It is another object of the present invention to provide such a configuration in which, for imparting to the user the feeling of having achieved the processing by the user touching a contact point of a service furnishing terminal without detracting from the convenience in use proper to a non-contact card, a portable information processing device designed for communication through a human body has a curved contact point in such a manner as to permit the contact point to be loaded on the human body in a state contacting the human body.

In its first aspect, the present invention provides an authentication information communication system made up of a portable information processing device executing the communication through a human body, and a service furnishing device, wherein the portable information processing device includes a contact point A contacting the human body to establish a communication path through the human body, fixed data

storage means for memorizing fixed user identification data capable of identifying a user, variable data storage means for holding variable user identification data corresponding to a service furnished by the service furnishing device, and outputting means for outputting at least authentication data which is based on the variable user identification data. The service furnishing device includes a contact point B contacting the human body to establish a communication path through the human body, and control means for controlling service execution based on the results of the authentication processing which is based on the authentication data. In the authentication information communication system, the portable information processing device preferably includes synthesizing means for synthesizing fixed user identification data stored in the fixed data storage means and variable user identification data stored in the variable data storage means. the synthesizing means generates authentication data which is based on the fixed user identification data and the variable user identification data.

In the authentication information communication system, the service furnishing device includes authentication means for executing authentication processing which is based on the authentication data transferred from the portable information processing device through the contact points A and B. The control means controls service execution based on the results of authentication processing by the authentication means.

In the authentication information communication system, the service furnishing

device preferably includes service identifier holding means for holding a service identifier corresponding to a service to be furnished. The portable information processing device is configured for storing the variable user identification data in the variable data storage means in association with the service identifier, wherein corresponding variable user identification data is extracted from the variable data storage means based on the service identifier received from the service furnishing device through the contact points A and B to output the authentication data which is based on the extracted variable user identification data.

In the authentication information communication system, the service furnishing device preferably includes means for generating user identification data for authentication corresponding to a service to be furnished. The portable information processing device is configured for receiving user identification data for authentication generated by the means adapted for generating user identification data for authentication from the service furnishing device through the contact points A and B for storage as variable user identification data in the variable user identification data storage means.

In the authentication information communication system, the authentication information communication system preferably further includes user management means for executing authentication processing for a user. The user management means includes a registration table having registered therein the user registration state and the service use state from one registered user to another. the user management means is

configured for executing the authentication processing based on the registration table.

Preferably, the authentication information communication system further includes service registration means for registering a service furnished to the user. The service registration means includes means for generating user identification data for authentication corresponding to a service to be furnished by the service furnishing device. The portable information processing device is configured for storing the user identification data for authentication generated by the service registration means in the variable user identification data storage means as variable user identification data.

In the authentication information communication system, the variable user identification data preferably includes the information for setting the service mode of a service furnished by the service furnishing device.

In its second aspect, the present invention provides a portable information processing device for executing communication with a service furnishing device through a human body. The portable information processing device includes a contact point A contacting the human body to establish a communication path through the human body, fixed data storage means for memorizing fixed user identification data capable of identifying a user, variable data storage means for holding variable user identification data corresponding to a service furnished by the service furnishing device and outputting means for outputting at least authentication data which is based on the variable user identification data.

Preferably, the portable information processing device includes synthesizing

means for synthesizing fixed user identification data stored in the fixed data storage means and variable user identification data stored in the variable data storage means. The synthesizing means generates authentication data which is based on the fixed user identification data and the variable user identification data.

In the portable information processing device, the variable user identification data preferably is stored in the variable data storage means in association with a service identifier in the portable information processing device, wherein corresponding variable user identification data is extracted from the variable data storage means, based on the service identifier received from the service furnishing device to output the data for authentication which is based on the extracted variable user identification data.

In the portable information processing device, the variable user identification data preferably includes the mode setting information for the service furnished by the service furnishing device.

In the portable information processing device, preferably the contact point A is curved in profile to follow the mounting side of the human body.

Preferably, the portable information processing device is adapted for being mounted on one of a finger, an arm, a neck, a leg, a foot or a head of the user.

Preferably, the portable information processing device is enclosed in any of a wrist-watch, a necklace, a ring, a hair band or a bracelet.

In the portable information processing device, preferably the fixed data storage

means and the variable data storage means are removable with respect to the portable information processing device.

In its third aspect, the present invention provides a method for authentication information communication executed by a portable information processing device including a contact point A adapted for establishing a communication path through a human body on having contact therewith and a service furnishing device including a contact point B adapted for establishing a communication path through a human body on having contact therewith, in which the method includes a step of transmitting service identification data from the service furnishing device to the portable information processing device through the contacts B and A, a step of extracting variable user identification data corresponding to the service identification data from the variable user identification data storage means in the portable information processing device, a step of generating data for authentication based on the variable user identification data as extracted, a step of outputting the data for authentication from the portable information processing device to the service furnishing device through the contact points A and B, and a step of controlling service execution in the service furnishing device based on the results of authentication processing for the data for authentication.

In the method for authentication information communication, the step of generating the data for authentication preferably includes a step of synthesizing the variable user identification data and the fixed user identification data.

In the method for authentication information communication, preferably the service furnishing device executes the step of authentication processing executing the authentication processing based on the data for authentication transmitted from the portable information processing device through the contact points A and B. The control step controls the service execution based on the result of authentication processing of the authentication processing step.

In the method for authentication information, the service furnishing device preferably includes a step of generating user identification data for authentication corresponding to a service to be furnished. The portable information processing device receives user identification data for authentication generated in the step of generating the user identification data for authentication, from the service furnishing device through the contacts B and A, and stores the so-received data in the variable user identification data storage means as variable user identification data.

The method for authentication information communication preferably further includes a user management step of executing authentication processing for a user. The user management step includes a step of generating a registration table having registered therein the user registration state and the service using state from one registered user to another. The authentication processing is carried out based on the registration table.

The method for authentication information communication preferably further includes a step of registering a service to be furnished to a user. The service

registration step includes a step of generating user identification data for authentication corresponding to a service furnished by the service furnishing device. The portable information processing device has a step of storing the user identification data for authentication generated in the service registration step in the variable user identification data storage means as variable user identification data.

In its fourth aspect, the present invention provides, in a system for authentication information communication executed by a portable information processing device having a contact point A adapted for establishing a communication path through a human body on having contact therewith and a service furnishing device having a contact point B adapted for establishing a communication path through a human body on having contact therewith, a program furnishing medium for tangibly furnishing a computer program which causes a processing executed on a service furnishing device to be executed on a computer system, in which the computer program includes a step of outputting service identification data from the service furnishing device through the contact point B to the portable information processing device, a step of receiving data for authentication generated by the portable information processing device based on the variable user identification data corresponding to the service identification data through the contact point B, and a step of controlling the service execution based on the result of authentication processing for the data for authentication.

In its fifth aspect, the present invention provides, in a system for authentication

information communication executed by a portable information processing device having a contact point A adapted for establishing a communication path through a human body on having contact therewith and a service furnishing device having a contact point B adapted for establishing a communication path through a human body on having contact therewith, a program furnishing medium for tangibly furnishing a computer program which causes a processing executed on a service furnishing device to be executed on a computer system, in which the computer program includes a step of receiving service identification data output from the service furnishing device to the portable information processing device through the contact point A, a step of extracting variable user identification data corresponding to the service identification data from the variable user identification data storage means, a step of generating data for authentication based on the variable user identification data as extracted, and a step of outputting the data for authentication from the portable information processing device to the service furnishing device through the contact point A.

The program furnishing medium, according to the fourth and fifth aspects of the present invention, is a medium for furnishing a computer program to a general-purpose computer system, capable of executing a variety of program codes, in a computer-readable form. The medium may be a recording medium, such as a CD, FD or MO, or a transmission medium, such as a network, without limitations as to its realization.

This program furnishing medium defines the structural or functional relation of

cooperation between the computer program and the furnishing medium for realizing a pre-set computer program on a computer system. Stated differently, there is achieved a cooperation on the computer system on installing the computer program through the furnishing medium on the computer system to realize the operation and favorable effects similar to those realized in the other aspects of the invention.

In the authentication information communication system and the authentication information communication method according to the present invention, in which the authentication processing between the portable equipment worn by the user and the service furnishing terminal furnishing a service is carried out by communication through a human body, and data communication is realized by the human body contacting respective contacts, the authentication processing occurs with the real physical feeling on the part of the user that the or she has actually made physical contact to resolve the ambiguity felt in the processing start recognition in a non-contact authentication system to relieve the user of uneasiness. Moreover, the laborious operation of taking out a card as in a conventional contact type authentication system employing a card or of readout by a sensor to assure a facilitated user operation.

Moreover, in the authentication information communication system and the authentication information communication method according to the present invention, in which the user-native identifier, proper to a user, and a user-variable identifier, generated from user to user depending on the service presented by the service terminal, are stored, and a service-native user identification data for authentication is generated

at the portable terminal from the user-native identifier and the user-variable identifier and forwarded to the service terminal, a variety of user management and service management operations, such as user-based assessment operations may be executed depending on the contents prescribed by the service identifier

In addition, in the authentication information communication system and the authentication information communication method according to the present invention, in which the service terminal sets a variable user ID matched to the service for the user, a variety of information items, such as information of the individual user, the information of the furnished service or limitations may be included in the variable user ID such that the service execution or the service mode can be modified based on the variable user ID received from the portable equipment.

Other objects, features and advantages of the present invention will become more apparent from the following detailed description of the present invention and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig.1 is a block diagram showing a basic structure of an authentication information communication system according to the present invention.

Fig.2 is a graph showing transmission properties across both hands of a user as measured using a spectrum analyzer within a range of 1 to 30 MHz.

Fig.3 is a graph for illustrating the relation between the intensity of the electrical field and the distance from an antenna.

Fig.4 illustrates the processing in a user side portable equipment in the authentication processing of the authentication information communication system according to the present invention.

Fig.5 illustrates the processing in a service terminal in the authentication processing of the authentication information communication system according to the present invention.

Fig.6 illustrates an illustrative structure of a portable equipment in the authentication information communication system according to the present invention.

Fig.7 illustrates the processing flow in the portable equipment in the authentication information communication system according to the present invention.

Fig.8 illustrates the processing flow in a service terminal in the authentication information communication system according to the present invention.

Fig.9, continuing to Fig.8, illustrates the processing flow in the service terminal in the authentication information communication system according to the present invention.

Fig.10 illustrates an example of using the authentication information communication system according to the present invention.

Fig.11, continuing to Fig.10, illustrates an example of using the authentication information communication system according to the present invention.

Fig.12 is a block diagram for illustrating the structure of a second embodiment in the authentication information communication system according to the present

invention.

Fig.13 illustrates typical processing at a service registration terminal of the second embodiment in the authentication information communication system according to the present invention.

Fig.15 illustrates typical processing at a service furnishing terminal of the second embodiment in the authentication information communication system according to the present invention.

Fig.16 illustrates an instance of using other embodiments in the authentication information communication system according to the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to the drawings, preferred embodiments of the present invention will be explained in detail.

Fig.1 shows the basic structure of an entire transmission/reception apparatus constituting a first embodiment of the authentication information communication system according to the present invention.

Referring to Fig.1, the authentication information communication system according to the present invention has a portable equipment 10 and a service terminal 20 as basic components and executes data transmission between the portable

equipment 10 and the service terminal 20 through a human body. The portable equipment 10 is realized as an equipment that can be held or worn by a user 30 and may, for example, be in the form of items of personal accessories, such as a wrist watch, a necklace, a bracelet or a ring, or a component, such as a card. A contact point 18 is provided in extremely close proximity to the user 30 so as to contact or be in electrically conductive state with the user 30.

The service terminal 20 is a terminal for purveying a variety of information, such as music, picture, map or the like information or selling commercial goods, installed on a street or in a store, an ATM terminal, provided in a bank, a wicket gate in a station, as means of traffic, seats in public means of conveyance, such as aircraft or electrical car, or a device embedded in a wall of a building for furnishing a wide variety of services. The communication may be had between the portable equipment 10 and the service terminal 20 by the user 30 contacting a contact point 29 of the service terminal 20, such as by touching with a finger or the palm of his or her hand.

The data transmission between the portable equipment 10 and the service terminal 20 through the human body occurs by the human body, that is a portion of the user 30, contacting a contact point 18 provided on the portable equipment 10 and the contact point 29 provided on the service terminal 20. Meanwhile, since the portable equipment 10 is an item of personal accessories, such as a wrist watch, the contact point 18 is normally in perpetual contact with or in extremely close proximity to the human body in a state of electrical conduction therewith. So, data transfer between

the portable equipment 10 and the service terminal 20 through the human body becomes feasible at a time point the user 30 touches the contact point 29 of the service terminal 20 .

The data transfer between the portable equipment 10 and the service terminal 20 is executed between a communication unit 15 of the portable equipment 10 and a communication unit 25 of the service terminal 20 . For this communication through the human body, the configuration shown in Japanese Laying-Open Patent H-7-170215 may be used. Since the human body may be thought of as an electrically conductive vessel composed mainly of salt-containing water, it is mostly electrically conductive in a frequency range of several MHz. Meanwhile, the values of the DC resistance across both hands, as measured e.g., by a tester, range from 500 k Ω to 2.3 M Ω .

Fig.2 shows transmission characteristics of the human body for AC. Specifically, Figs.2a and 2b show transmission characteristics across both hands of the human body as measured with a spectrum analyzer in a frequency range of from 1 MHz to 20 MHz and in a frequency range of from 1 MHz to 30 MHz, respectively. In both cases, a coaxial cable is connected to a tracking generator and to an input terminal. Meanwhile, the grounding points (GND) of the coaxial cable are connected in common to prevent the cable from serving as an antenna. Referring to Figs.2a and 2b, the transmission characteristics for 1 to 20 MHz are generally flat and exhibit attenuating characteristics of 30 dB to 40 dB.

The measured results shown in Figs.2a and 2b indicate that the output

impedance of a tracking generator and an input impedance of the spectrum analyzer are both equal to 75Ω . So, if the impedance across both hands is e.g., $1\text{ M}\Omega$, in terms of AC, the attenuation should reach even -80dB . However, the attenuation is far smaller than this value, thus supporting the possibility of signal transmission through the human body.

The data transmission side may be thought of as a minor dipole antenna such that the state of the electromagnetic field thereby generated has sufficiently been analyzed. Specifically, it indicates that the electromagnetic field generated by a human body is generated from the minute dipole antenna. The intensity of the electromagnetic field is expressed as a vector sum of components inversely proportional to the distance R from the antenna, inversely to the square of the distance R and inversely proportional to the third power of the distance R . These components are termed the radiating electromagnetic field, inductive electromagnetic field and static electromagnetic field, respectively. The mathematical equation expressing the above relation is stated in detail in the Japanese Laying-Open Patent H-7-170215.

Fig.3 shows the intensity of the electrical field. Specifically, Fig.3a is a graph showing the relation between the respective terms of the intensity of the electrical field and the distance from the antenna. Fig.3b shows the relation between the electrical field intensity and the distance of a dipole antenna of $\lambda/2.2$ and a loop antenna of $3.4\text{ cm}\phi$ on one hand and a loop antenna of $8\text{ cm}\phi$ and $3.4\text{ cm}\phi$, on the other hand, for a frequency $f = 200\text{ MHz}$ and a transmission terminal voltage $= 100\text{ dB}\mu\text{V}$. As may be

seen from Figs.3a and 3b, the intensities of the radiating electromagnetic field, inductive electromagnetic field and the static electromagnetic field (term of $1/R$), term of $1/(\text{square of } R)$ and term of $1/(\text{third power of } R)$ become equal at a distance of $\lambda/2\pi$ and is increased acutely as the distance diminishes. For $f = 11$ MHz, this distance is approximately 4.3 m. In the authentication information communication system of the present invention, the transmission system mainly employing the static electromagnetic field is desirably applied.

As for the intensity of the electrical field, it is desirable to select a usable range of the electrical field intensity without limitations by the EMI (Electromagnetic Interference) regulations of the radio law. For example, the frequency is to be 332 MHz or less and the electrical field intensity is to be $500 \mu\text{V/M}$ or less.

The static electromagnetic field is attenuated by a third power of the distance R . For example, if the distance is increased from 1 m to 3 m, the intensity of the electrical field is $1/27$ ($1/3 \times 3 \times 3$). Thus, if the distance from the data communication means is increased, the signal intensity is attenuated drastically. So, even if plural users are employing similar devices, the possibility of the signals of the other user being captured as noise is low, such that, even in an environment in which there are a large number of users employing similar devices in proximity to one another, communication mainly employing the static electromagnetic field can be had satisfactorily.

Meanwhile, the contact point 18 provided on the portable equipment 10

preferably is of a larger area and may be curved in profile so as to be wound about the finger, arm or neck of the human body, as a wrist watch, necklace, ring or a bracelet, so that the contact point will contact the skin of the human body over a wide contact area.

The portable equipment 10 includes a fixed data storage unit 16 and a variable data storage unit 17, as storage units for authentication data for memorizing an ID used for personal authentication, such as an authentication number of a credit card or ATM. In the fixed data storage unit 16 is stored a fixed server-native user identifier proper to the user. In the variable data storage unit 17 is stored a variable user identifier, such as an identifier which is varied from one service offered by the service terminal to another. The modes and processing of these identifiers are explained subsequently in detail. Meanwhile, the fixed data storage unit 16 and the variable data storage unit 17 may be configured as memories removable with respect to the portable equipment 10.

As these fixed and variable user identifiers or the identification information which is based on these identifiers are sent from the communication unit 15 of the portable equipment 10 to the communication unit 25 of the service terminal 20, authentication check is made by the CPU 21 of the service terminal 20 to permit access to the information stored e.g., in the RAM 22 of the service terminal 20. Thus, the service terminal 20 is able to send the information stored in the RAM from the communication unit 25 of the service terminal 20 to the communication unit 15 of the portable equipment 10, whilst the portable equipment 10 on reception of the data is

able to store the received data e.g., in a memory circuit of the RAM 12. Meanwhile, the ROM 13 of the portable equipment 10 or the ROM 23 of the service terminal 20 has stored therein an OS for managing the basic control of the respective devices, and the basic software, such as a device driver, so that, on turning on the power sources, the basic software thus stored may be read out by the CPU to operate the respective devices.

As the power source of the portable equipment 10, a small-sized power source of long useful life, such as lithium battery, not shown, is preferably used. The CPU 11 is fed with the power from the lithium battery to perform a variety of processing control operations, such as data readout, data transmission, data reception or data storage.

The communication between the portable equipment 10 and the service terminal 20 may be performed in such a manner that detection means provided on the service terminal 20 detects that a human body, that is a portion of the user 30, has touched the contact point 29 of the service terminal 20, with the service terminal 20 then being responsive to this detection to output a service identifier as later explained to the portable equipment 10 through the communication unit 25, contact point 29 and the user 30.

Alternatively, it is also possible for the communication unit 25 of the service terminal 20 to output service identifier data stored in service identifier storage means 28 continuously or at an interval of a few seconds. The data outputting interval of the

communication unit 25 in this configuration is selected so that a transmission signal is received through the user 30 by the communication unit 15 of the portable equipment 10 carried by the user at least once every few seconds, that is whenever the user 30 touches the contact point 29 of the contact point 29 of the service terminal 20.

Conversely, the communication unit 15 of the portable equipment 10 may be configured for transmitting a signal, such as a user ID, stored in the fixed data storage unit 16 or variable data storage unit 17, continuously or every few seconds. The data outputting interval of the communication unit 25 in this configuration is also selected so that a transmission signal is received by the communication unit 25 of the service terminal 20 at least once every few seconds, that is whenever the user 30 touches the contact point 29 of the service terminal 20.

For the authentication processing, as later explained, the transmitted signal is data required for authentication, such as user ID or service identifiers.

After the authentication processing, a variety of processing operations, based on the authentication, such as opening/closure of a ticket gate, receipt/payment processing by ATM or the processing for furnishing the various contents information, such as the information on music, picture, map or commercial goods.

Meanwhile, the various contents information, such as the information on music, picture, map or commercial goods, may also be transferred through the human body, stored in the portable equipment, is output by outputting means, such as annexed

display. If secret information is contained in the data for transmission, the transmission data may be encrypted on the data recording side for decoding on the receiving side. In this case, a variety of encryption processing means, such as random number generating means or timestamp processing means, are provided on the data transmission side. On the receiving side, there are provided decoding means for decoding the received encrypted data.

The communication unit, configured by the portable equipment 10 and the service terminal 20, transmits/receives signals by physical contact between the user 30 and the respective contacts 18, 19. The received signal is decoded by a demodulator provided in each communication unit and thence transferred through the network in each terminal or over a network outside the terminal to respective storage means, information processing means or authentication processing means, under control by the CPU 21.

Meanwhile, the portable equipment 10 may be configured for supplying the power to the CPU only when data transmission or processing is required. The useful life of the battery of the portable equipment 10 may be protracted by a configuration in which the power supply is started responsive to a reception signal from the service terminal 20.

Certain specified examples of the authentication processing and data transfer processing in the authentication information communication system shown in Fig. 1 are hereinafter explained. Assume that the user 30 wearing the portable equipment 10 has

contacted the service terminal 20 by the contact point 29. If the user 30 has contacted the service terminal 20 for the first time, the registration processing for authentication is performed.

For authentication registration processing, the service terminal 20 generates user identification data for authentication (variable user identifier) in a user identifier generating unit for authentication 26 to transmit this user identification data (variable user identifier) along with the service identifier 28 through the communication unit 25 to the communication unit 15 of the communication terminal 10. The transmitted user identification data (variable user identifier) is stored in the variable data storage unit 17 of the portable equipment 10.

The configuration of the variable data storage unit 17 and the processing in a synthesis unit 14 are shown in Fig.4. The variable data storage unit 17 is of a table structure, shown for example in Fig.4, and is configured for memorizing the user identification data for authentication (variable user ID: 00010011) for a record having a service identifier received from the service terminal 20, such as service ID: 101, as a key.

The synthesis unit 14 of the portable equipment 10 synthesizes the user identification data for authentication (variable user (ID): 00010011) received from the service terminal 20 to the server-native fixed identifier (fixed user identifier (ID): 10100000) stored from the outset in the fixed data storage unit 16.

The identifier generated by the synthesis processing in the synthesis unit 14 is

the service-native user identifier which is valid only for the user identified by the fixed user ID: 10100000 and which also is valid for the service, for example, the service prescribed by e.g., the service ID: 101, that is for specified services.

The portable equipment 10 transmits to the service terminal 20 the service-native user identifier, valid for the specified service, and which is generated by the synthesis unit 14, for example, the user identifier (ID) [10100000/00010011] for the service stated on the upper right side of Fig.4. This service-native user identifier, transmitted from the portable equipment 10 to the service terminal 20 through the human body, is received by the communication unit 25 of the service terminal 20 through the contact point 18 of the portable equipment 10, user 30 and the contact point 29 of the service terminal 20 .

The received data is memorized in a data storage unit for authentication 27. This data storage unit for authentication has a hash table structure similar to that of the variable data storage unit 17, that is a table structure having a fixed user identifier as a user identifier for authentication, as a key, and memorizes the received service-native user identifier in a table.

If the user 30 has not contacted the service terminal 20 for the first time, the portable equipment 10, receiving data of the service identifier 28 held by the service terminal 20, such as data 010, takes out the user identifier for authentication (variable user ID) corresponding to the service identifier and which has been received from the variable data storage unit 17, based on the received service identifier, to execute the

synthesis processing with the server-native fixed identifier (fixed user ID) stored in the fixed data storage unit 16 to generate the service-native user identifier which is transmitted to the service terminal 20 .

Referring to Fig.4, a specified example of this processing is explained. Assume that the service identifier furnished by the service terminal 20 is [010], the service terminal 20 is an information furnishing terminal installed in a convenience store, and that the service identifier [010] specifies a goods discount ticket issuing service. A user having the portable equipment 10, enclosed e.g., in a wrist-watch, touches his or her finger or palm on the contact point 29 of the service terminal 20 installed in the convenience store. The service terminal 20 detects the finger or the palm by a sensor provided on the contact point 29 to retrieve the service identifier [010] from a service identifier holder 25 which is output through the communication 25 to the user 30. The service identifier [010] is received by the user's skin and the portable equipment 10 of the wrist-watch type, having the contact point 18, through the human body of the user 30.

The portable equipment 10, which has received the service identifier [010] retrieves the variable data storage unit 17 to take out [00010011] as a variable user ID corresponding to the service identifier [010] to send the variable user ID [00010011] thus taken out to the synthesis unit 14. The synthesis unit 14 synthesizes the variable user ID [00010011] and the fixed user ID [10100000] stored in the fixed data storage unit 16 to produce service-native user identification data [1010000000010011] valid

[illegible][illegible][illegible]

on the result of the authentication processing.

The variable user ID can be constituted as data representing the period as set by e.g., the service terminal 20 as being a period during which a goods discount ticket can be issued. By this arrangement, the service terminal 20 which has received the variable user ID checks the valid period from the variable user ID to verify that the user is entitled to authentic service only during the valid period to execute the service. In the case of a commutation ticket, the period and domain data are jointly registered in the variable user ID so that its validity can be determined solely from the variable user ID received from the portable equipment.

The services presented by the service terminal 20 may be opening/closing processing of an entrance gate, wicket gate, entrance to a building, or entrance to a laboratory, or may also be a variety of services, such as receipt/payment processing in ATM. If the service is the opening/closure of the ticket gate, the wicket is opened based on the authentication processing to permit only the authenticated user to pass through the wicket. In this case, the contact point 29 is provided in each ticket gate.

If the service terminal 20 holds plural service identifiers and a table, having stored therein the service-native user identification data in association with each service identifier, it is possible to offer different services to each person.

In the above-described embodiment, the fixed user ID and the variable user ID are simply joined together as synthesized data which is used as the service-native user identification data. The service-native user identification data may be generated not

only by the above-described method, but also by a configuration in which a new data string is generated by e.g., a pre-defined function, based on the fixed user ID and the variable user ID, with the data string so generated being then sent to the service terminal 20 for decoding by the service terminal 20. It is also possible to output only the variable user ID to the service terminal 20 which then executes authentication processing based only on the variable user ID to determine whether or not the user identification and service execution are feasible. Since the service terminal 20 is configured for setting the variable user ID for a user depending on services, it is possible to get a variety of information pieces, such as the information of each user, the information on the services furnished or limitations, contained in the data of the variable user ID.

If the service terminal 20 is a terminal furnishing the information, the variable information pieces, such as music or picture information furnished based on the authentication processing, may be displayed on demonstration means, such as a display, provided in the service terminal 20. Moreover, similarly to the authentication data, the picture information etc. may be transmitted from the service terminal to the user through the human body. The mode of transmitting the picture or speech information through the human body is described in detail in our previous present application (Japanese Laying-Open Patent H-7-170215) filed by the same assignee as that of the present application.

Fig.6 shows an example of a portable equipment 10. Specifically, Fig.6a shows

a structure in which a contact point is provided on a bracelet 601 and a structure as the portable equipment 10 shown in Fig.1 is enclosed. Fig.6b shows a structure in which a contact point is provided on a necklace 602 and a structure as the portable equipment 10 shown in Fig.1 is enclosed, whilst Fig.6c shows a structure in which a contact point is provided on a ring 603 and a structure as the portable equipment 10 shown in Fig.1 is enclosed. Fig.6d shows a structure in which a contact point is provided on a wrist watch 604 and a structure as the portable equipment 10 shown in Fig.1 is enclosed. The contact point of the bracelet 601, necklace 602, ring 603 and the wrist watch 604 are provided on the sides contacting the human body, that is on the inner peripheral side, such as to permit data transmission between the portable equipment 10 and the service terminal 20 through these respective contact points and physical contact points of the human body contacting the contact point 29 of the service terminal 20, shown in Fig.1, such as the human body, as the user, or the finger or the palm of the user. Thus, the portable equipment 10 is designed as a wrist-watch, necklace, ring, hair band, or a bracelet configured for being worn by the finger, arm, neck, leg or foot of the user.

Referring to Figs.7 to 9, the authentication processing flow in the authentication processing communication system of the present invention is now explained. Fig.7 shows a processing flow of the portable equipment 10 in the authentication processing communication system shown in Fig.1, while Figs.8 and 9 show a processing flow in different embodiments of the service terminal 20 in the authentication processing

communication system shown in Fig. 1.

First, the processing flow of the portable equipment 10 of Fig. 7 is explained. The step 701 is a step for ascertaining rise in potential at the contact point 18, that is a step for verifying the potential of the contact point 18 with the potential necessary for data reception as a threshold value. When the contact point potential reaches a level permitting data reception, a service ID sent at step 702 from the service terminal 20 through the human body of the user 30 is received.

On reception of the service ID, the portable equipment 10 at step 703 takes out the variable user ID corresponding to the received service ID from the variable data storage unit 17, while taking out the fixed user ID from the fixed data storage unit 16 to synthesize the IDs in the synthesis unit 14 to generate an ID for authentication. At step 704, the portable equipment 10 outputs the generated ID for authentication to the service terminal 20 through the human body.

The portable equipment 10, which has output the ID for authentication to the service terminal 20, waits at step 705 for an ACK response from the reception side, that is from the service terminal. If the ACK response is received, the portable equipment 10 waits for a further processing request from the service terminal (step 706). If a request is made, the portable equipment 10 executes processing at step 707.

The flow shown in Fig. 7 is the processing flow assumed to occur at a specified service terminal, for example, in a bank ATM. The processing as from step 705 in the flow of Fig. 7 differs depending on the mode of the service terminal. If the service

terminal 20 is a bank terminal, the ACK response at step 705 in the flow of Fig.7 differs depending on the modes of the service terminal. If the service terminal 20 is a bank terminal, the ACK response at step 705 corresponds to the ACK display processing on a display after authentication based on the output ID at step 704 is made. The processing request at step 706 is a request for the amount to be drawn, while the execution of processing at step 707 corresponds to the processing for amount designation by a user.

If the service terminal is a wicket gate, and an ID for authentication is output from the portable equipment of the user at step 704, the terminal connected to the wicket gate as the service terminal executes the opening/closure based on the result of authentication. Thus, the processing flow of Fig.7 differs depending on the processing furnished by the service terminal.

A typical processing at the service terminal is explained by referring to Fig.8, showing an example of services only for processing the operation of an equipment such as a ticket gate of a railroad station. The step 801 is a step for ascertaining the rise in the potential of the contact point 29 for data transmission. When the contact point potential reaches the data transmission enabling state, a service ID is transmitted at step 802 through the human body and the contact point 29 to the portable equipment 10.

The portable equipment 10 which has received the service ID takes out from the variable data storage unit 17 the variable user ID corresponding to the received service

ID, while taking out the fixed user ID from the fixed data storage unit 16. The portable equipment 10 then performs synthesis at the synthesis unit 14 to generate an ID for authentication which is output to the service terminal 20. On reception of the ID for authentication at step 803, the service terminal 20 at step 804 executes authentication processing of the ID for reception authentication. This processing is executed by the authentication unit 24 of Fig.1. If, as a result of authentication in the authentication unit 24, the validity of the authentication ID is verified to be valid at step 805, the services as set on the service terminal is executed at step 806. If the services are verified at step 805 not to be authentic services, the processing transfers to step 807 where the services are discontinued to terminate the processing.

A different processing example at the service terminal side is explained with reference to Fig.9. The example of Fig.9 is a processing example for services furnishing the various information items such as picture information, music information and other information. The step 901 is a step for ascertaining the rise in the potential of the contact point 29, that is a step for verifying the potential of the contact point 29 with the potential necessary for data transmission as a threshold value. When the contact point potential reaches a transmission enabling state, the service ID is transmitted at step 902 from the service terminal 20 through the body of the user 30 to the portable equipment 10.

On reception of the service ID, the portable equipment 10 takes out a variable user ID corresponding to the received service ID from the variable data storage unit

17, while taking out the fixed user ID from the fixed data storage unit 16 to synthesize the two IDs in the synthesis unit 14 to generate an ID for synthesis which is output to the service terminal 20. On reception of the ID for authentication from the portable equipment 10 at step 903, the service terminal 20 at step 904 executes the authentication processing of an ID for reception authentication. This processing is executed by the authentication unit 24 in Fig.1. If, as a result of the authentication by the authentication unit 24, the authenticity of the ID for authentication is checked at step 905 and determined to be not valid, the services are discontinued to terminate the processing. If the ID for authentication is determined to be valid at step 905, a processing request prescribed at the service terminal is output at step 906. Then, at step 906, a response to the processing request is awaited. If a response is made, the processing is executed at step 908 to transmit the requested data.

In the above-described processing at the service terminal shown in Figs.8 and 9, the flow of Fig.8, for example, corresponds to an instance of a security check service in a building. In this case, the service at step 806 is the controlling of the opening/closure of a building door, whilst the service interruption at step 807 means cessation of the door opening/closure operation. The processing of registering an invalid ID may also be performed as a processing accompanying the service cessation at step 807.

The processing flow of Fig.8 is equivalent to an instance of settlement services in a communication system. In this case, the services at step 806 may be configured

in Fig.9, there is a remote equipment controlling equipment. For example, in a hospital where electrical waves are generated, use of portable telephones is limited. There may now be realized a terminal which is able to furnish services enabling the use of a telephone equipment to a bed-ridden patient.

Referring to Fig.11, an example of a service terminal executing the processing flow shown in Fig.9 is explained. A patient 40 wears a wrist-watch type portable equipment 41 having a display. A patient desirous to call on a telephone touches a wire-like contact point 42 hung from the wall to have communication with a service terminal 44 or with a remote service terminal through a wall 43.

By the patient 40 having the wire-like contact point 42, a service ID is transmitted at step 902 from the service terminal 44. An ID for authentication is sent from the portable equipment 41, responsive thereto, so that authenticity check of the ID for authentication is carried out at step 904 at the service terminal 44.

If authenticity is verified by the authentication processing, a processing request is made, that is, an output of telephone number data is requested to the patient at step 906. The telephone number data is configured for being output by speech or through a telephone number inputting key provided on the portable equipment 41 by the patient. On reception of these telephone numbers, the service terminal 44 at step 908 executes telephone connection processing. In this configuration, a modem function is built in the service terminal 44. The service terminal 44 is further connected through a circuit in the precincts 45 to a digital switcher 46, by which the user is able to call on

the telephone to outside through an external public telephone network.

If the service terminal 44 has the function of an automatic answering telephone, the corresponding information may be received by the portable equipment 41 by the patient having the wire-like contact point 42. The information can then be reproduced, using the replay function of the portable equipment 41, after separating the contact point 42.

Embodiment 2

An illustrative system configuration in which the authentication information communication system is made up of a portable equipment 100 worn by a user, a service furnishing terminal 110, a service registration terminal 120 and a clearing house 130 for performing user management, such as authentication or assessment, as shown in Fig.12, is now explained as a second embodiment.

The service furnishing terminal 110 is a terminal furnishing real services, for example, a terminal furnishing contents information, such as music or picture information, or a terminal provided in many variable places for furnishing variable services, such as ticket gate of a recreation park or a wicket gate of a railroad station. Although only one service furnishing terminal 110 is shown in Fig.12, plural service furnishing terminals 110 are provided in necessary places through a network 140. For example, if the service terminal is to execute wicket gate opening/closing processing operations, plural service furnishing terminals 110 are provided at respective gate positions. In Fig.12, only one structure is shown for avoiding complexity.

A CPU 111 of the service furnishing terminal 110 forwards the information stored in a RAM 113 from circuit units 2, 115 of the service furnishing terminal 110 to a communication unit of the portable equipment 100. On reception of the data, the portable equipment 100 stores the received data in a storage circuit, such as a RAM in the portable equipment 100. Meanwhile, communication units 1, 114 are used for communication with the service registration terminal 120 and with the clearing house 130. In a ROM 112 of the service furnishing terminal 110, there are stored basic software items, such as OS or device drivers, adapted for performing basic control of the respective devices, and are read out by the CPU 111 to operate the respective devices.

The service registration terminal 120 is a terminal where a user 30 effects registration necessary for receiving services from the service furnishing terminal 110. If, for example, the service furnishing terminal 110 is a wicket gate of a railroad station, the service registration terminal 120 is provided in a railroad station where the commutation ticket or railroad tickets are sold. If the service furnishing terminal 110 is an entrance gate of a recreation park, it is installed in an entrance ticket selling spot. If the service registration terminal 120 is a furnishing terminal of the contents information, such as music or picture information, the service registration terminal 120 is installed in, for example, an information furnishing terminal installed in a convenience store or a railroad station, or as an ATM device.

A CPU 121 of the service registration terminal 120 forwards the information

stored in a RAM 123 from the communication unit 2 or 125 in the service registration terminal 120 to a communication unit in the portable equipment 100. On reception of data, the portable equipment 100 is able to store the received data in a storage circuit, such as a RAM, provided on the portable equipment 100. It is noted that a communication unit 1 or 124 is used for communication with the service furnishing terminal 110 or with the clearing house 130. In a ROM 122 in the service registration terminal 120, there are stored basic software items, such as OS or device drivers, adapted for performing the basic control of the respective devices, and are read out by the CPU 121 to operate the respective devices.

The service registration terminal 120 is provided with input/output equipment for registration processing, such as a display, a microphone or a loudspeaker for information input/output. The user 30 carrying the portable equipment 100 has communication through the contact point 128 provided in the service registration terminal 120 even when the user has communication with the service registration terminal 120. When the user carrying the portable equipment 100 touches the service registration terminal 120 at the contact point 128, the potential at the contact point 128 in the service registration terminal 120 rises to permit communication. The service registration terminal 120 then first requests the user to execute service selection processing.

A service selection unit 127 in the service registration terminal 120 demonstrates for the user a message 201 shown in Fig.13 on a display provided on the

service registration terminal 120 or on a display arranged in circuit with the service registration terminal 120 to prompt the user to select one of service items in a selection picture 202.

When the user 30 selects one of the service items from the selection picture 202 of the display shown in Fig. 13, by inputting means, such as a touch input, a keyboard input or the speech input, the service registration terminal 120 forwards a service identifier, matched to the service as selected by the user 30, to the portable equipment 100 worn by the user 30, through the communication unit 2 or 125 and the contact point 128.

On reception of the service identifier, the portable equipment 100 of the user selects the variable user ID (see Figs. 1 and 4) as in the first embodiment. If the user 30 has not utilized the services even once, the variable user ID is an initialized value, such as 0.

The synthesis unit 14 of the portable equipment 100 of the user 30 (see Figs. 1 and 4) synthesizes data of the fixed storage unit, that is fixed user ID provided as a fixed value for the user at the outset, and the variable user ID corresponding to the services stored in the variable data storage unit 17, to generate a service-native user identifier, which is transmitted to the service registration terminal 120 so as to be received by the communication unit 2 or 125.

The service registration terminal 120 has communication with the clearing house 130, using the communication units 1, 124, to execute authentication processing

for the user 30.

The clearing house 130 includes a service furnishing terminal 110, a work area for a program executed by communication units 1, 134 for executing communication with the service registration terminal 120, a ROM 132 having stored therein a basic software, such as an OS for performing basic control or a device driver, and a program executed by the CPU 131, and a RAM 133 for temporarily storing input data, and executes authentication processing for the user 30. The authentication processing for the user 30 is such that the communication unit 1, 14 receives authentication data of the user 30 through the Internet or the like communication circuit 140, and received data is sent to an authentication unit 135 where the processing similar to that explained in connection with Fig.4 is carried out to execute authentication processing.

The authentication processing is performed using a registration table 14 memorized in an assessed amount authentication data storage unit 136 of the clearing house 130. The assessed amount authentication data storage unit 136 of the clearing house 130 includes a registration table of a data structure shown for example in Fig.14. In this registration table, there can be set the maximum number of times of use and the current number of times of use from user to user. The registration table 14 is merely illustrative such that items corresponding to service modes, such as service using duration, service using time, service using territories or other service details are set depending on the services furnished.

When the registration table shown in Fig.14 is used, the following three modes

may be thought of as the statuses of the registration table of the assessment amount authentication data storage unit 136 from user to user:

- (1) The user 30 already has used certain services in the past, in his or her using hysteresis, such that there is already a record having a coincident user ID in the assessment amount authentication data storage unit 136, however, there is no record corresponding to the present request service;
- (2) since the user has used the same service as that requested now, there is the corresponding fixed ID record; and
- (3) since the user has not used the services, the user ID has not been registered.

In (1) and (3) of the above modes, user registration is newly required for the service requested by the user 30. So, the request for registration processing is notified to the service registration terminal 120, which then executes a user registration processing for the service requested by the user 30. Specifically, a user identifier generating unit 126 generates a user identifier (variable user identifier) and transmits the user identifier so generated from the communication unit 2, 125 through the contact point 128 and the user 30 to the portable equipment 10 of the user along with the service identifier of the relevant service. The portable equipment 100 of the user 30 causes a pair of the received service identifier and the variable user identifier to be stored in association with the variable data storage unit 17 (see Fig.4).

The user, who has registered the service identifier and the variable user identifier associated with the service identifier in the variable data storage unit 17 of

the portable equipment 100, synthesizes the fixed user identifier of the fixed data storage unit and the variable user identifier, now received, by the synthesis unit 14 of the portable equipment 100, to generate a service-native user identifier, which then is forwarded to the service registration terminal 120, thereby requesting the service registration terminal 120 to execute user registration processing.

The service registration terminal 120, which has received the request for user registration, requests user registration by transmitting the received service-native user identifier to the clearing house 130. On reception of the service-native user identifier, the clearing house 130 prepares a record corresponding to the service-native user identifier for the own assessment amount authentication data storage unit 136 to set the maximum number of times of use to a pre-set value as well as to initialize the current number of times of use to 0.

The user 30, who has executed the above procedure and has completed the user registration, holds the service-native user identifier in the variable data storage unit of the portable equipment 100 and hence is able to receive the requested service through the service furnishing terminal 110.

The user 30 desirous to be furnished with a service touches the contact point 116 of the service furnishing terminal 110 to get the service identifier for the portable equipment 100 through the human body of the user 30. The portable equipment 100 is responsive thereto to synthesize the registered variable user ID and the fixed user

ID to generate a service-native user identifier which is transferred to the service furnishing terminal 110.

This service-native user identifier is transferred through e.g., a network, to the clearing house 130, where the authentication processing and updating of the number of times of use of the registration table of the assessed amount authentication data storage unit 136 are executed. The authentication processing is similar to that of the previous embodiment. Through this procedure, the user 30 is able to receive a service from the service furnishing terminal 110 up to the number of times of use.

The case of (2), that is the case in which the service requested for the present time was used in the past such that a corresponding fixed ID record exists in the registration table, is explained. The case of (2) may be divided further into the following two cases: (2-1) The current number of times of use is not in excess of the maximum number of times of use; and (2-2) the current number of times of use has already exceeded the maximum number of times of use.

In the case of (2-1), the clearing house 130 forwards a message: "registration is not required" to the service registration terminal 120. On reception of this message, the service registration terminal 120 advises that effect to the user 30 to terminate the processing. In the case of (2-2), the clearing house 130 sends a message: "updating is required". On reception of this message, the service registration terminal 120 advises the user 30 of that effect to make inquiry as to whether or not updating is to be performed. If the user agrees to the updating, the clearing house 130 is asked to

perform updating.

The updating processing in the clearing house 130 is specifically the processing of setting the current number of times of use of the record corresponding to the registration table of the assessed amount authentication data storage unit 136 to 0. If the user 30 is not willing to agree to the updating, an inquiry is made to the user 30 as to whether or not the record in the registration table of the assessed amount authentication data storage unit 136 is to be deleted. If the user 30 has agreed to the record deletion, the clearing house 130 is requested to delete the record. The clearing house 130 then deletes the record from the assessment amount authentication data storage unit 136. If the user is not willing to delete the record, the service registration terminal 120 instantly terminates the processing.

The processing for such a case wherein a user 30 owning the portable equipment 100 contacts the service furnishing terminal 110 with a contact point 116 to be furnished with the service is now explained. To the service furnishing terminal 110 are annexed a demonstration display 118 and a microphone 119 as a data input/output equipment adapted for furnishing the service, such that, when the service is initiated, there is demonstrated a guide presentation on the demonstration display 118 as shown for example in Fig.15. On the demonstration display is displayed a service selection picture 301.

When the user 30 touches the contact point 116 of the service furnishing terminal 110, the service furnishing terminal 110 reads out data of a service identifier

storage unit 117 to transmit the service identifier to the portable equipment 100 of the user 30 through the communication units 2, 115, contact point 116 and the body of the user 30.

Referring to Fig.4, the processing following reception of the service identifier is explained. Assume that the service identifier is [010]. Since [00010011] is stored as variable user identifier in a record corresponding to the service identifier [010] in the variable data storage unit 17 of the portable equipment 100, the fixed user identifier stored in the fixed data storage unit 16 is synthesized to the variable user identifier in the synthesis unit 14 to generate e.g., data [1010000000010011].

This data, which is a user identifier native to the service, is forwarded to the service furnishing terminal 110. The service furnishing terminal 110, which has received the data, then forwards the data to the clearing house 130 to make request for user authentication and assessment processing. On reception of the service-native user identification data transmitted from the service furnishing terminal 110, the authentication unit 135 executes the processing of separately generating the fixed user identifier [10100000] and the variable user identifier [00010011], based on the server-native user identifier, and subsequently proceeds to access the assessed amount authentication data storage unit 136 to make authentication as to whether or not the user has been registered.

If the authentication has been made correctly in the assessed amount authentication data storage unit 136, using the registration table shown in Fig.14, a

message "authentication OK" is sent to the service furnishing terminal 110, at the same time as the current number of times of use of the record in the assessment amount authentication data storage unit is decremented by one. The service furnishing terminal 110, which has received the message "authentication OK" from the clearing house 130, furnishes the service.

If authentication in the clearing house 130 has failed, a message "authentication has failed" is demonstrated on a display 118 annexed to the service furnishing terminal 110 to terminate the processing.

In the above embodiment, data sent from the communication units 1, 114, communication units 2, 115, communication units 1, 124, communication units 2, 125 and the communication units 1, 134 may be forwarded as they are encrypted so that the data will be received by the respective communication units and subsequently decoded.

The above-described embodiment refers to a configuration in which the service furnishing terminal 110 mainly furnishes the information using a display. Alternatively, the service the user is desirous to receive may also be a an opening/closing operation of a wicket gate of a railroad station or a recreation park, in which case the service furnishing terminal 110 is constituted as a wicket gate in each of the railroad stations or in each of plural sites in the park. In this case, the service furnishing terminal 110 of Fig.12 is provided in association with each gate. The user 30 touches the contact point 116 of the service furnishing terminal 110 and transfers

009207" 22595950

is made to the registration table. In this manner, variable services can be furnished by the service registration terminal, whilst the authentication processing and management on the service basis and on the user basis are also feasible.

The foregoing explanation has been centered basically about the instance of the portable equipment to be authenticated. The portable equipment may also not be in need of the authentication, for example, the authentication function of the present portable equipment may be turned off, or the user is unconditionally held to be valid. In such case, the portable equipment may also be used as an information exchange equipment, that is as an external information inputting system. For example, if a contact point is built into a pre-set location in an electric rolling stock, such as a portion of an advertisement or a hand strap, the advertisement information in the electric rolling stock may be input to the portable equipment. Alternatively, the information may be retrieved into a memory in the portable equipment or the information may be output through a display or a loudspeaker annexed to the portable equipment.

Moreover, if two users wearing wrist-watch or bracelet type portable equipment 201, 202 shake hands, data transfer may be realized between the portable equipment 201, 202 through the human bodies of the two persons shaking their hands. Moreover, if the authentication processing configuration is enclosed in the portable equipment 201, 202, the information can be transferred between the persons carrying the authenticated portable equipment, however, the information transfer is not realized to

an unauthenticated counterpart.

Although the present invention has been explained with reference to particular embodiments thereof, it is apparent that those skilled in the art can make suitable corrections or substitutions of the above-described embodiments without departing from the scope of the invention. The present invention has been disclosed only by way of illustration and should not be interpreted in a limiting fashion. The scope of the present invention is to be interpreted in light of the description of the following claims.

009207 22695960

WHAT IS CLAIMED IS:

1. An authentication information communication system made up of a portable information processing device executing the communication through a human body, and a service furnishing device, wherein said portable information processing device includes

a contact point A contacting the human body to establish a communication path through said human body;

fixed data storage means for memorizing fixed user identification data capable of identifying a user;

variable data storage means for holding variable user identification data corresponding to a service furnished by said service furnishing device; and

outputting means for outputting at least authentication data which is based on said variable user identification data; and wherein said service furnishing device includes

a contact point B contacting the human body to establish a communication path through said human body; and

control means for controlling service execution based on the results of the authentication processing which is based on said authentication data.

2. The authentication information communication system according to claim 1 wherein said portable information processing device includes

synthesizing means for synthesizing fixed user identification data stored in said

fixed data storage means and variable user identification data stored in said variable data storage means;

said synthesizing means generating authentication data which is based on said fixed user identification data and said variable user identification data.

3. The authentication information communication system according to claim 1 wherein said service furnishing device includes

authentication means for executing authentication processing which is based on said authentication data transferred from said portable information processing device through said contact points A and B;

said control means controlling service execution based on the results of authentication processing by said authentication means.

4. The authentication information communication system according to claim 1 wherein said service furnishing device includes

service identifier holding means for holding a service identifier corresponding to a service to be furnished; and wherein said portable information processing device is configured for storing said variable user identification data in said variable data storage means in association with said service identifier;

corresponding variable user identification data being extracted from said variable data storage means based on said service identifier received from said service furnishing device through said contact points A and B to output the authentication data which is based on the extracted variable user identification data.

device; said portable information processing device being configured for storing the user identification data for authentication generated by said service registration means in said variable user identification data storage means as variable user identification data.

8. The authentication information communication system according to claim 1 wherein said variable user identification data includes the information for setting the service mode of a service furnished by said service furnishing device.

9. A portable information processing device for executing communication with a service furnishing device through a human body, said portable information processing device comprising:

a contact point A contacting the human body to establish a communication path through said human body:

fixed data storage means for memorizing fixed user identification data capable of identifying a user;

variable data storage means for holding variable user identification data corresponding to a service furnished by said service furnishing device; and

outputting means for outputting at least authentication data which is based on said variable user identification data.

10. The portable information processing device according to claim 9 comprising:

synthesizing means for synthesizing fixed user identification data stored in said fixed data storage means and variable user identification data stored in said variable

data storage means;

said synthesizing means generating authentication data which is based on said fixed user identification data and said variable user identification data.

respect to the portable information processing device.

17. A method for authentication information communication executed by a portable information processing device including a contact point A adapted for establishing a communication path through a human body on having contact therewith and a service furnishing device including a contact point B adapted for establishing a communication path through a human body on having contact therewith, said method comprising:

a step of transmitting service identification data from said service furnishing device to said portable information processing device through said contacts B and A;

a step of extracting variable user identification data corresponding to said service identification data from said variable user identification data storage means in said portable information processing device;

a step of generating data for authentication based on the variable user identification data as extracted;

a step of outputting said data for authentication from said portable information processing device to said service furnishing device through said contact points A and B; and

a step of controlling service execution in said service furnishing device based on the results of authentication processing for said data for authentication.

18. The method for authentication information communication according to claim 17 wherein said step of generating said data for authentication includes a step of

user management step including a step of generating a registration table having registered therein the user registration state and the service using state from one registered user to another;

said authentication processing being carried out based on said registration table.

22. The method for authentication information communication according to claim 17 further comprising:

a step of registering a service to be furnished to a user;

said service registration step including a step of generating user identification data for authentication corresponding to a service furnished by said service furnishing device;

said portable information processing device having a step of storing the user identification data for authentication generated in said service registration step in said variable user identification data storage means as variable user identification data.

23. In a system for authentication information communication executed by a portable information processing device having a contact point A adapted for establishing a communication path through a human body on having contact therewith and a service furnishing device having a contact point B adapted for establishing a communication path through a human body on having contact therewith, a program furnishing medium for tangibly furnishing a computer program which causes a processing executed on a service furnishing device to be executed on a computer system, said computer program comprising:

a step of outputting service identification data from said service furnishing device through said contact point B to said portable information processing device;

a step of receiving data for authentication generated by said portable information processing device based on the variable user identification data corresponding to said service identification data through said contact point B; and

a step of controlling the service execution based on the result of authentication processing for said data for authentication.

24. In a system for authentication information communication executed by a portable information processing device having a contact point A adapted for establishing a communication path through a human body on having contact therewith and a service furnishing device having a contact point B adapted for establishing a communication path through a human body on having contact therewith, a program furnishing medium for tangibly furnishing a computer program which causes a processing executed on a service furnishing device to be executed on a computer system, said computer program comprising:

a step of receiving service identification data output from said service furnishing device to said portable information processing device through said contact point A;

a step of extracting variable user identification data corresponding to said service identification data from said variable user identification data storage means;

a step of generating data for authentication based on the variable user identification data as extracted; and

a step of outputting said data for authentication from said portable information processing device to said service furnishing device through said contact point A.

ABSTRACT

A system for executing personal authentication processing by communication through a human body, in which authentication corresponding to a service to be furnished can be executed efficiently. The authentication processing between a portable equipment worn by a user and a service furnishing terminal is executed by a human body touching a contact point of the service furnishing terminal. The processing occurs with a real physical feeling of user contact. A user-native identifier and a user-variable identifier generated from user to user depending on the service presented by a service terminal are stored in a user equipment. Responsive to the service identifier transmitted from the service terminal, service-native user identification data, derived at least from the user variable identifier, is generated in the portable equipment and forwarded to the service terminal. A variety of user management operations, such as user-based assessment operations, depending on service contents, are carried out.

009201" 22696960

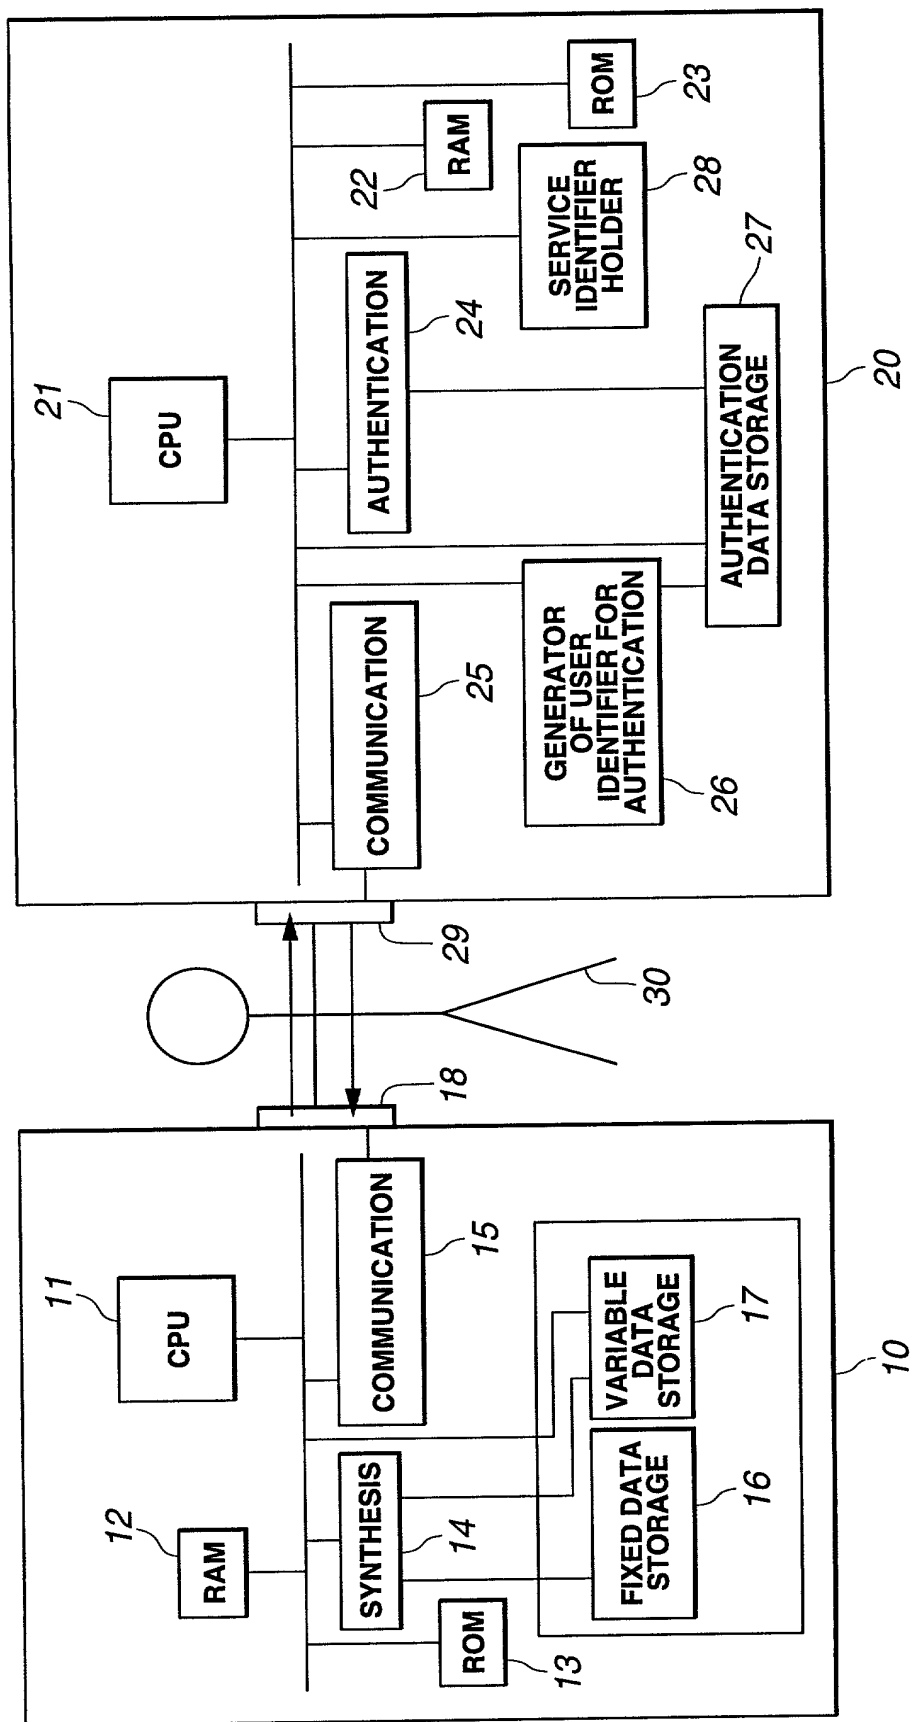


FIG.1

000001" 2636360

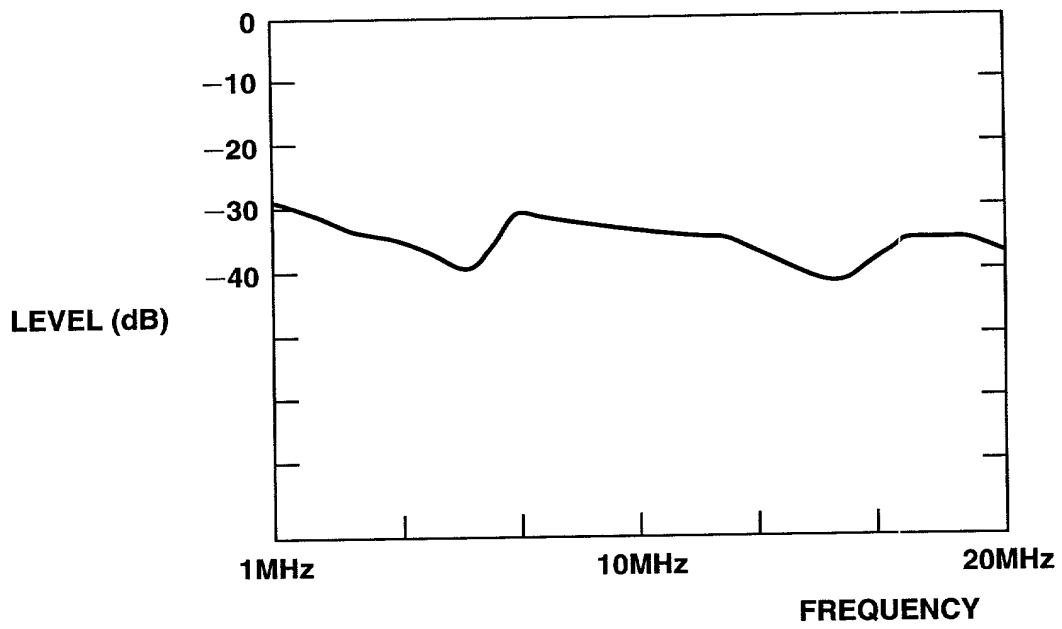


FIG.2A

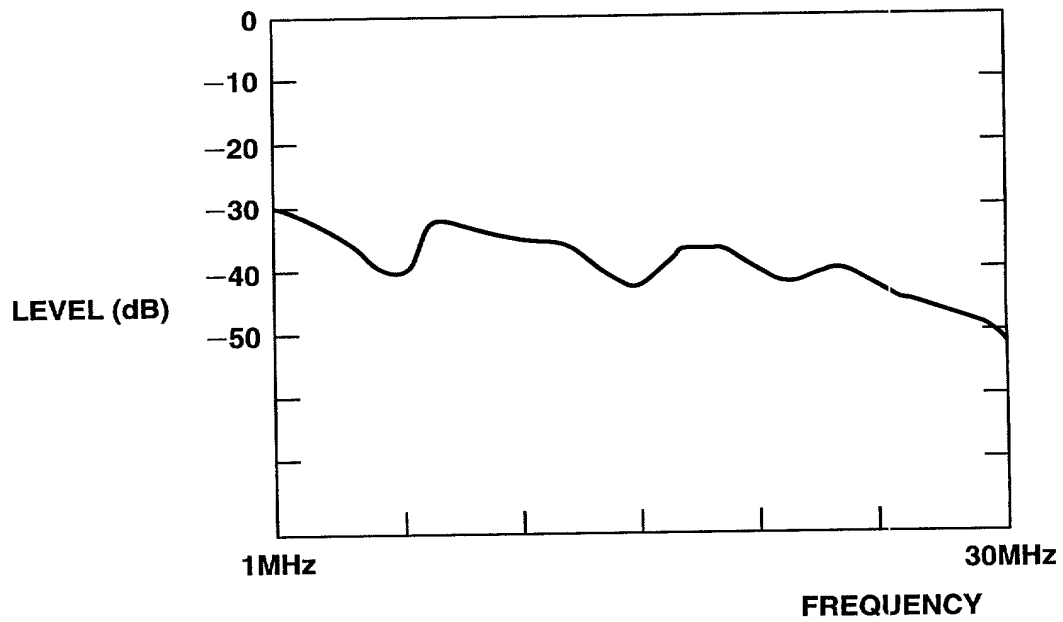


FIG.2B

009207 22696960

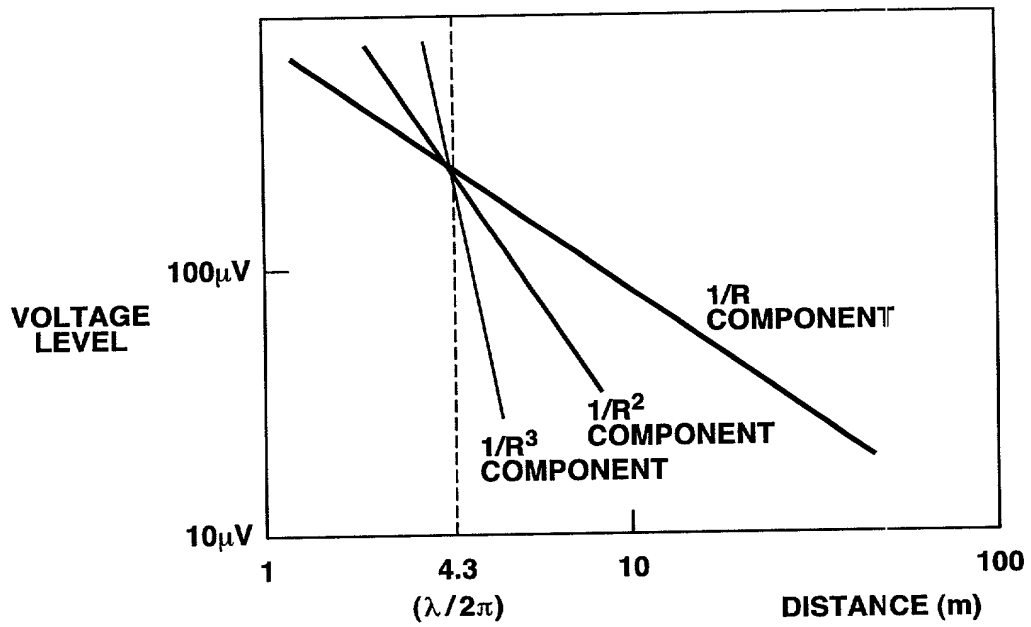


FIG.3A

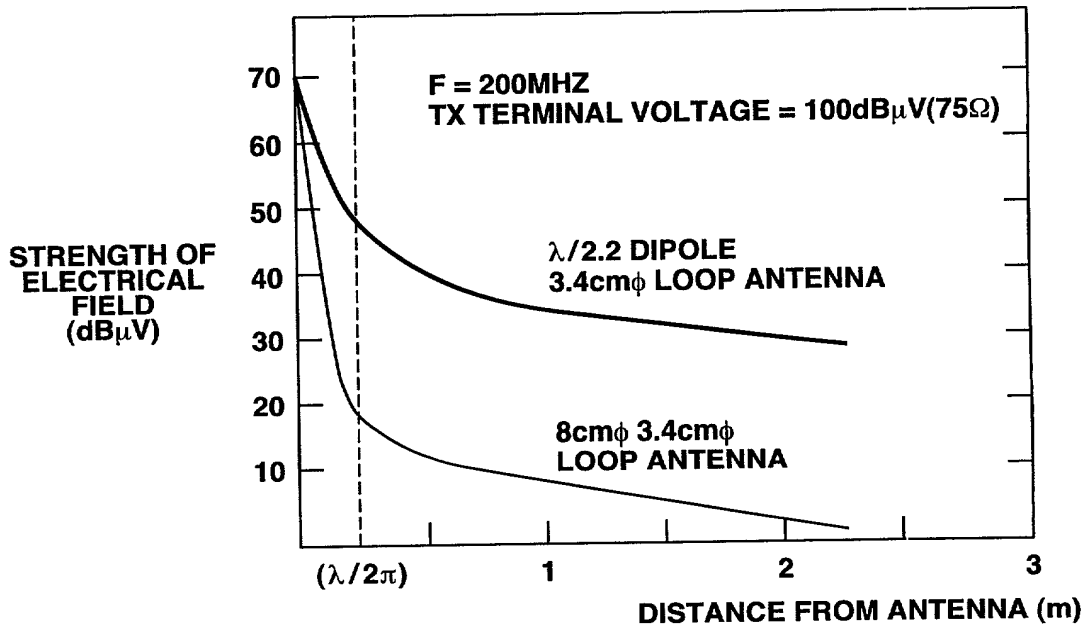


FIG.3B

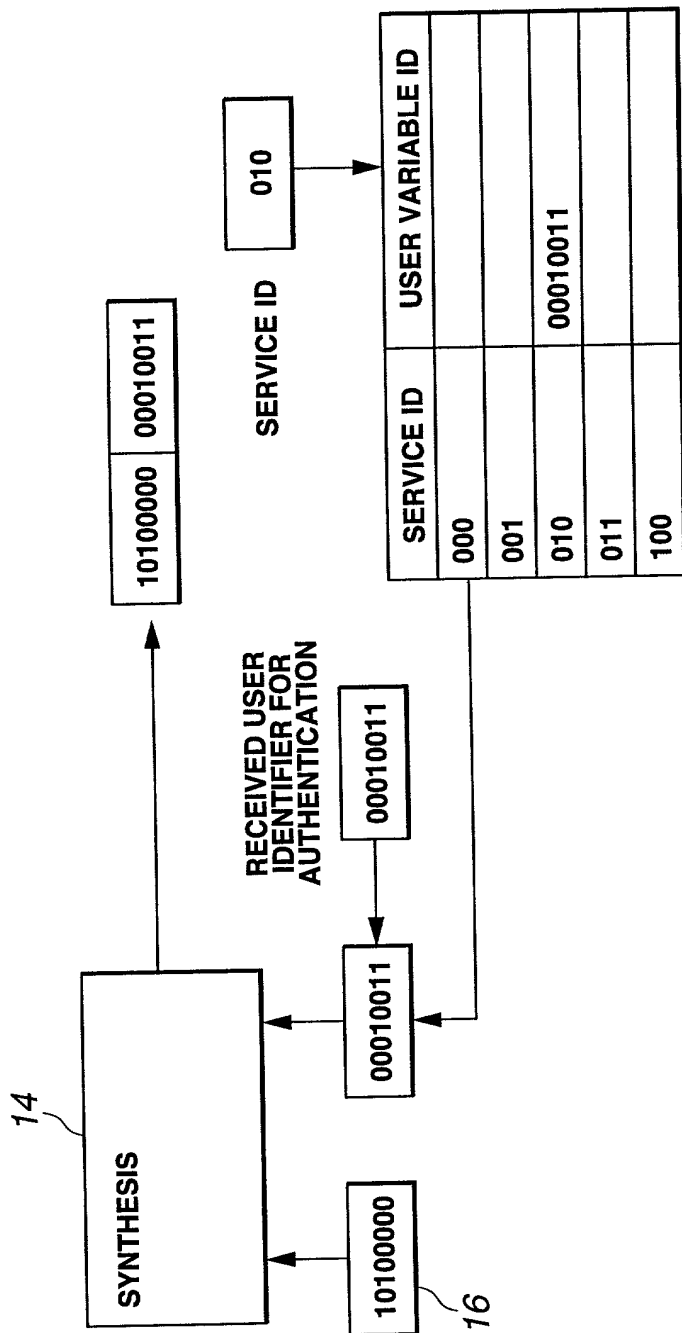


FIG.4

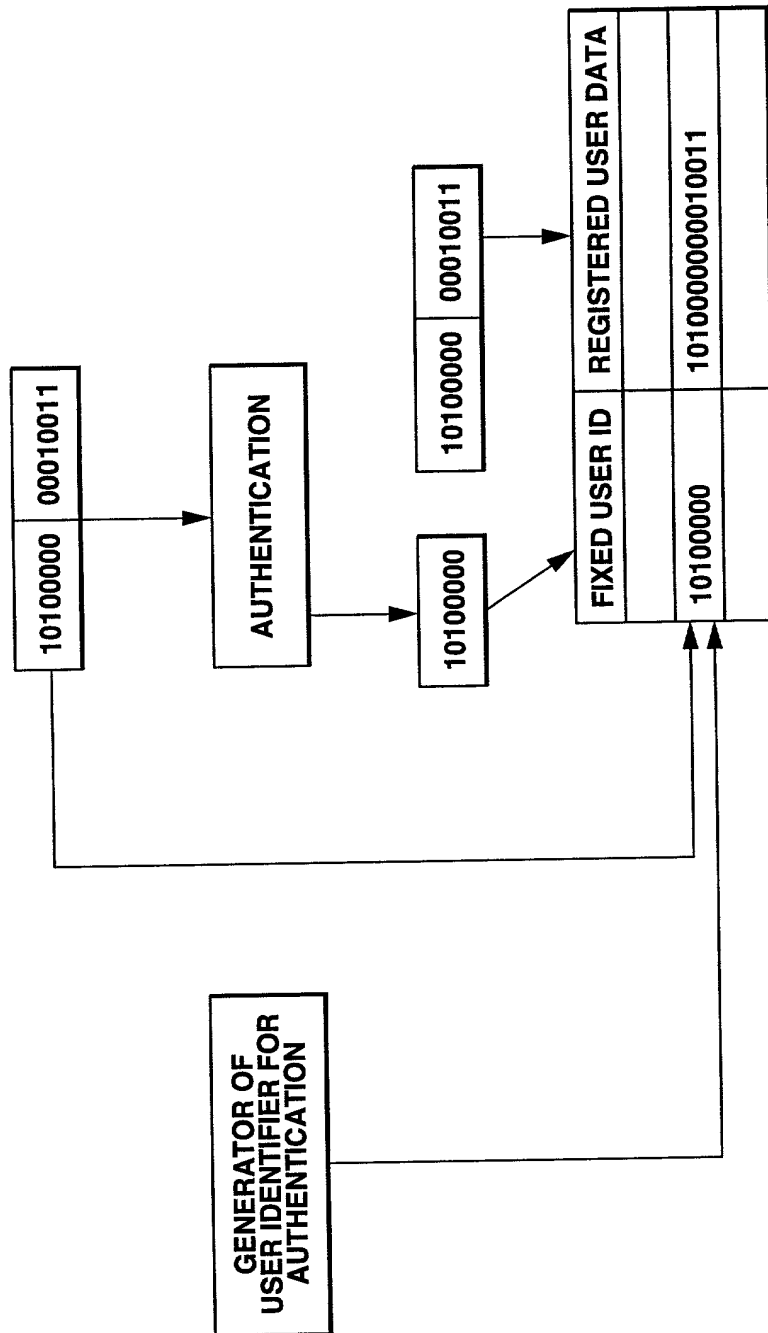


FIG.5

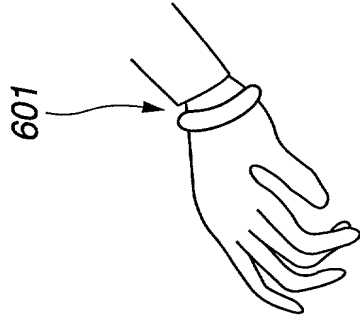


FIG. 6A

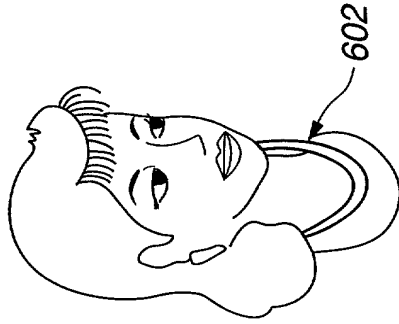


FIG. 6B




FIG. 6C

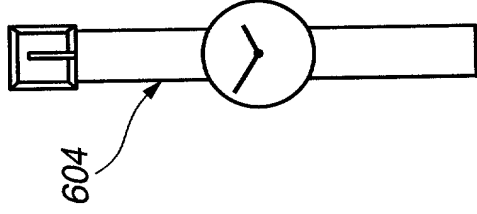


FIG. 6D

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 1.5
Gender (male/female)	100/100
Education (years)	12.0 ± 1.0
Marital status (married/divorced/widowed)	100/100/100
Occupation (retired/employed)	100/100
Income (USD/month)	1,000 ± 200
Health status (good/poor)	100/100
Smoking status (smoker/non-smoker)	100/100
Alcohol consumption (yes/no)	100/100
Comorbidities (hypertension/diabetes/cholesterol)	100/100/100
Medication (antidepressant/antipsychotic)	100/100
Duration of illness (years)	10.0 ± 2.0
Family size (number of children)	2.0 ± 1.0
Living arrangement (alone/together)	100/100
Religious beliefs (religious/agnostic)	100/100
Life satisfaction (satisfied/dissatisfied)	100/100
Overall health (good/poor)	100/100
Physical activity (active/sedentary)	100/100
Stress level (low/high)	100/100
Loneliness (yes/no)	100/100
Depression (yes/no)	100/100
Anxiety (yes/no)	100/100
Substance use (yes/no)	100/100
Overall quality of life (good/poor)	100/100

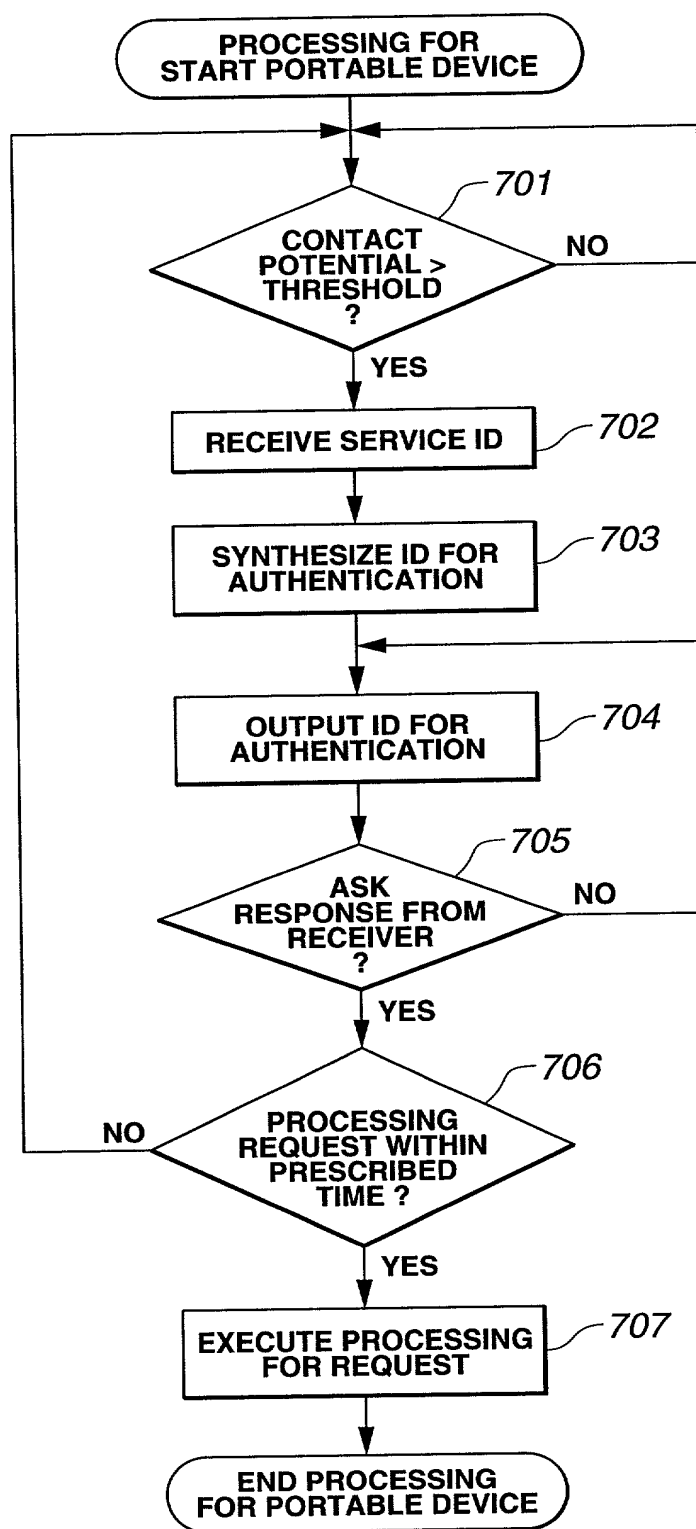


FIG.7

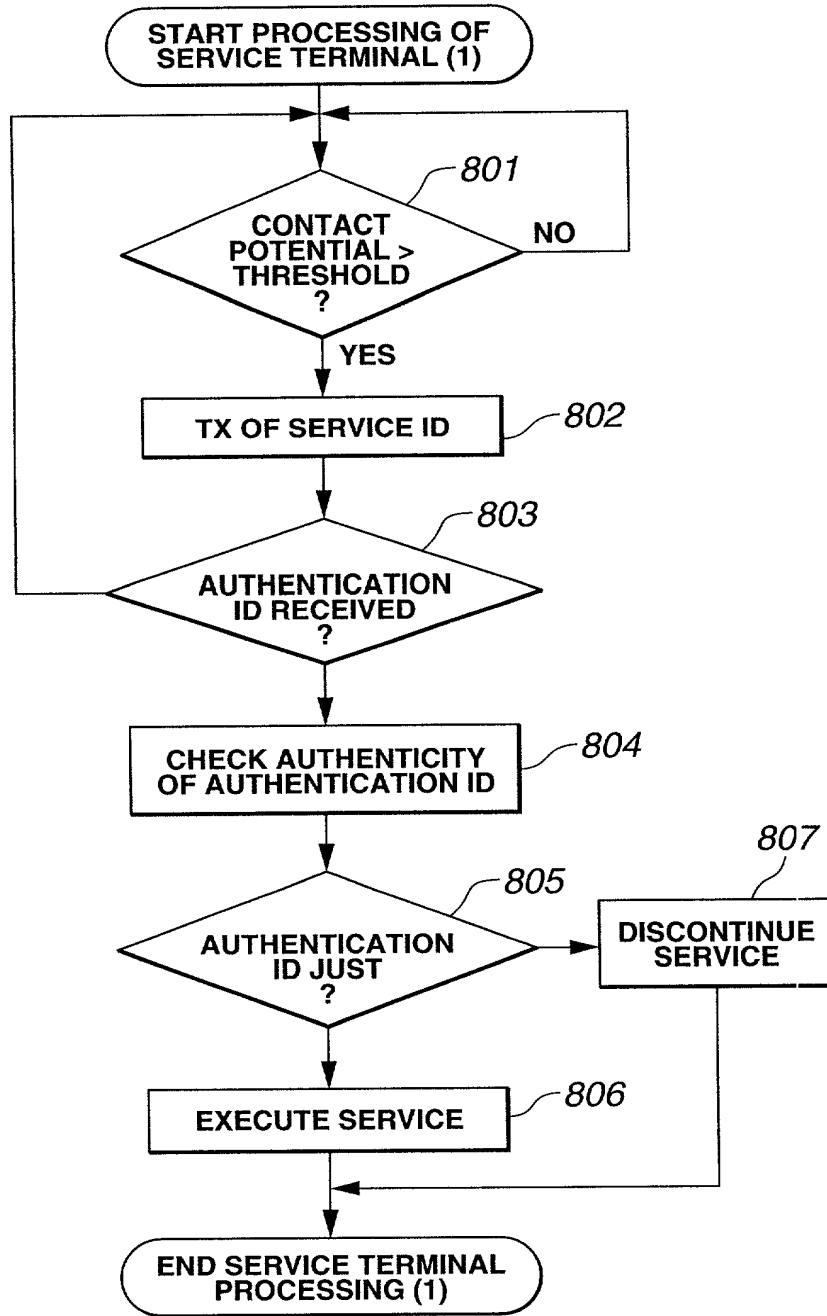


FIG.8

```

graph TD
    Start([START PROCESSING OF  
SERVICE TERMINAL (2)]) --> 901{CONTACT  
POTENTIAL >  
THRESHOLD ?}
    901 -- NO --> 901
    901 -- YES --> 902[TX OF SERVICE ID]
    902 --> 903{AUTHENTICATION  
ID RECEIVED ?}
    903 -- NO --> 901
    903 -- YES --> 904[CHECK AUTHENTICITY  
OF AUTHENTICATION ID]
    904 --> 905{AUTHENTICATION  
ID JUST ?}
    905 -- NO --> 909[DISCONTINUE  
SERVICE]
    905 -- YES --> 906[TX OF PROCESSING  
REQUEST]
    906 --> 907{RESPONSE ?}
    907 -- NO --> 906
    907 -- YES --> 908[EXECUTE PROCESSING  
AND TRANSMIT DATA]
    908 --> End([END SERVICE TERMINAL  
PROCESSING (2)])
    909 --> End

```

FIG.9

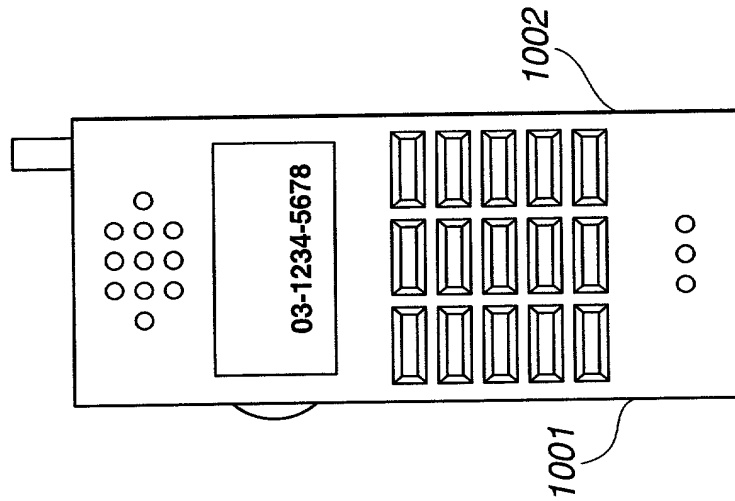


FIG.10A

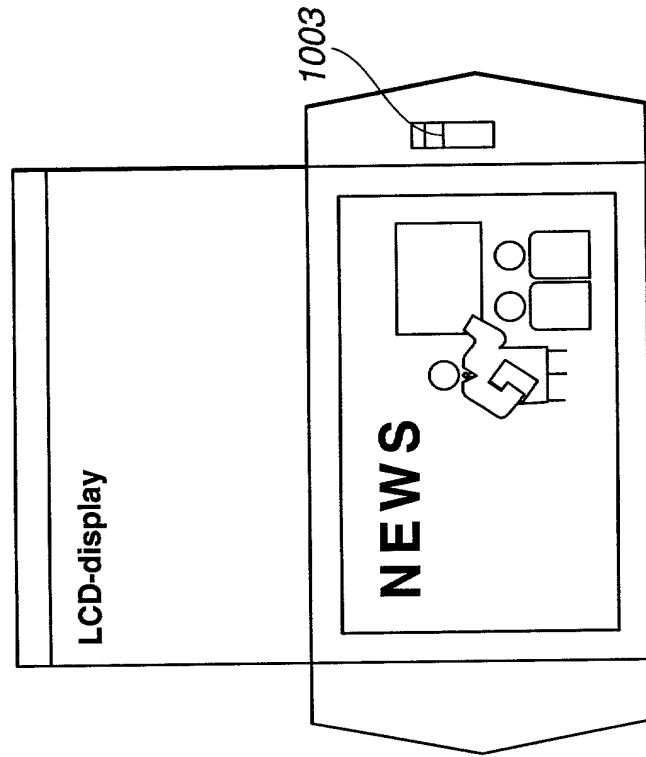


FIG.10B

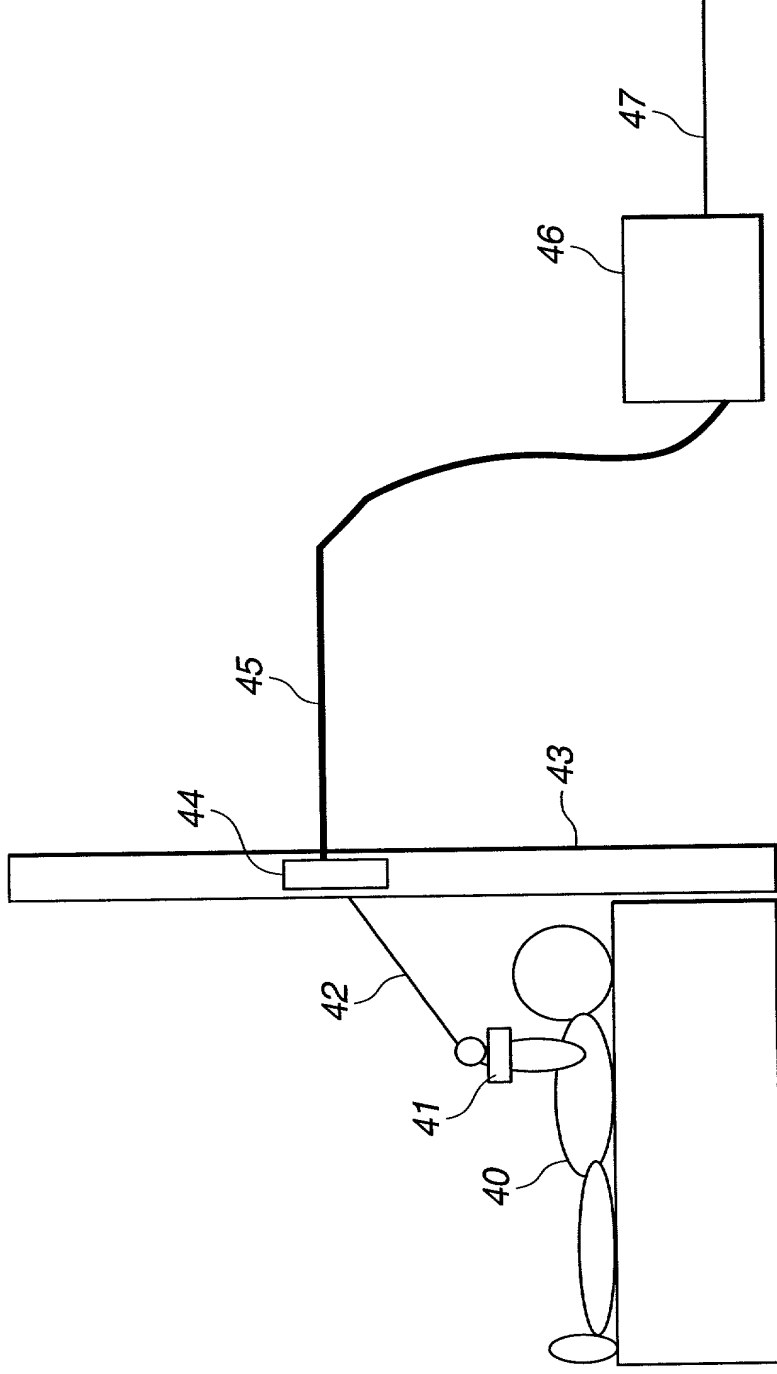


FIG.11

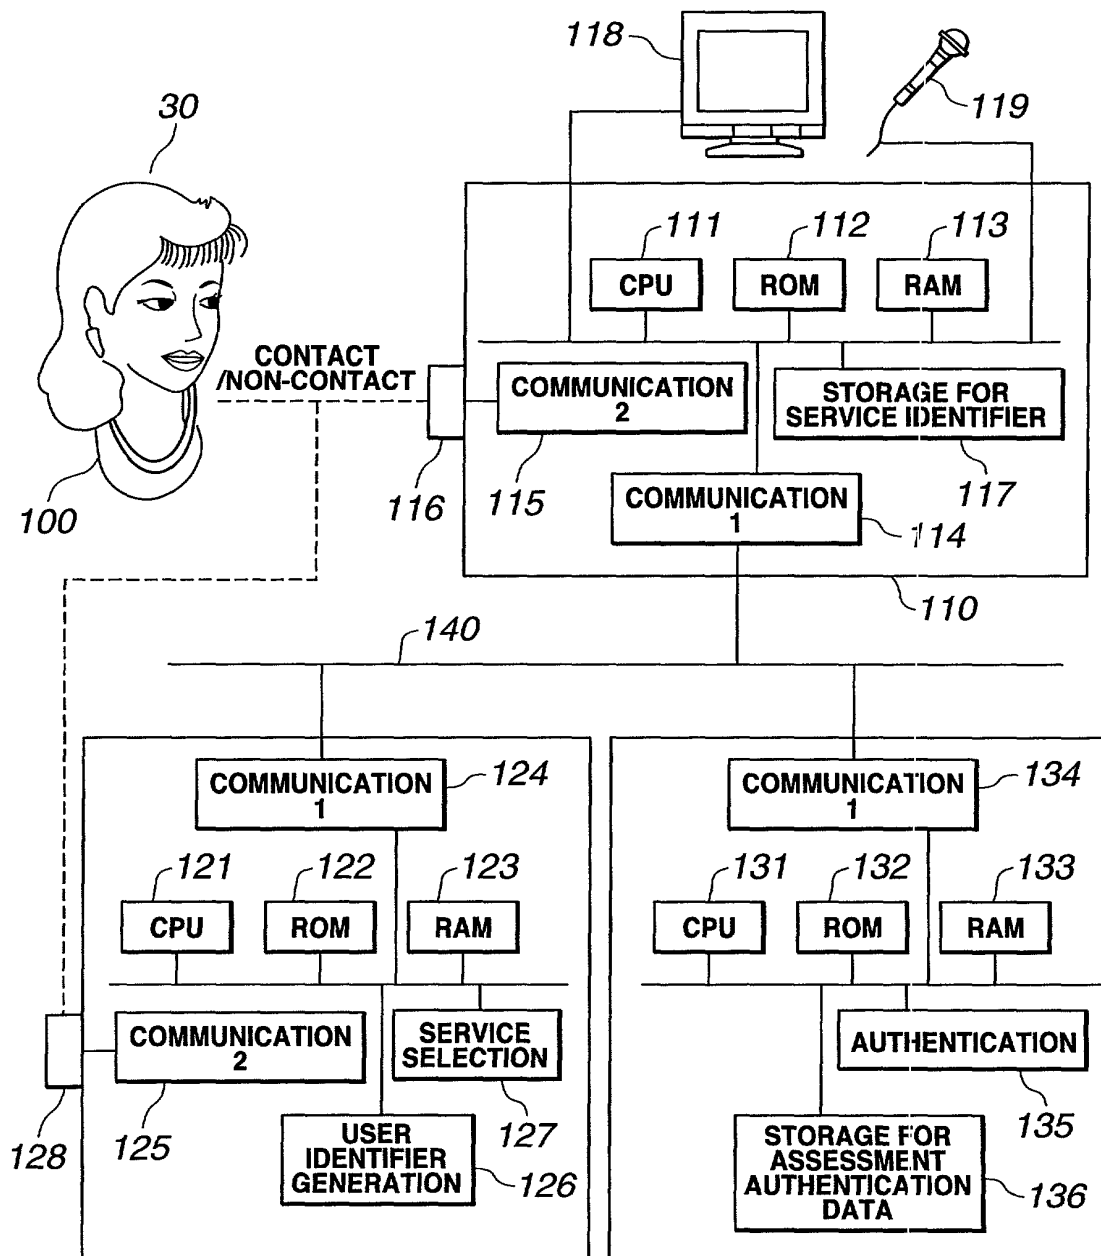


FIG.12

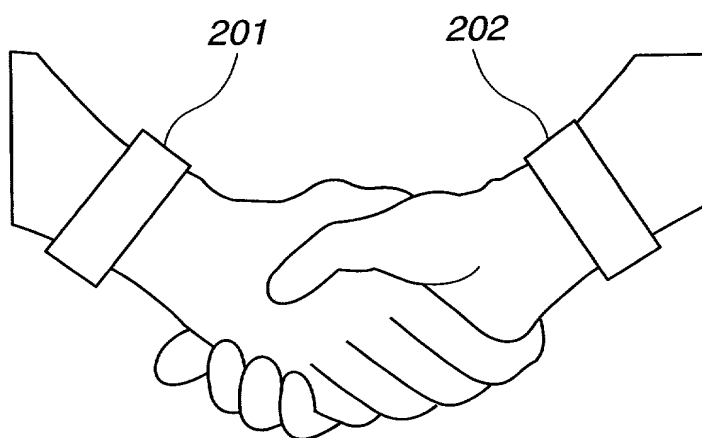


FIG.16

SONY-U0361

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。	As a below named inventor, I hereby declare that:
私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。	My residence, post office address and citizenship are as stated next to my name.
下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。	I believe I am the original, first and sole inventor (if only one named is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled. <u>AUTHENTICATION INFORMATION COMMUNICATION SYSTEM AND METHOD, PORTABLE INFORMATION PROCESSING DEVICE AND PROGRAM FURNISHING MEDIUM</u>
上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、 <input type="checkbox"/> 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、 (該当する場合) _____ に訂正されました。	the specification of which is attached hereto unless the following box is checked: <input type="checkbox"/> was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).
私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。	I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.
私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。	I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.
私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。	I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.
Prior Foreign Application(s) 外国での先行出願 P11-310517 _____ Japan (Number) (Country) (番号) (国名) P2000-253305 _____ Japan (Number) (Country) (番号) (国名)	Priority Not Claimed 優先権主張なし 1 November 1999 _____ (Day/Month/Year Filed) (出願年月日) 24 August 2000 _____ (Day/Month/Year Filed) (出願年月日)
私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。	I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.
_____ (Application No.) (出願番号)	_____ (Filing Date) (出願日)
_____ (Application No.) (出願番号)	_____ (Filing Date) (出願日)

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may be jeopardize the validity of the application or any patent issued thereon.

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark office connected therewith (*list name and registration number*)

Karl A. Limbach	18,689
George C. Limbach	19,305
John K. Uilkema	20,282
Neil A. Smith	25,441
Veronica C. Devitt	29,375
Ronald L. Yin	27,607
Gerald T. Sekimura	30,103
Michael A. Stallman	29,444
Philip A. Girard	28,848
Michael J. Pollock	29,098

Steven M. Everett	30,050
Alfred A. Equitz	30,922
Charles P. Sammut	28,901
Mark C. Pickering	36,239
Patricia Coleman James	37,155
Kathleen A. Frost	37,326
Alan A. Limbach	39,749
Douglas C. Limbach	35,249
Seong-Kun Oh*	
Kyla L. Harriel	41,815

* Recognition under 37 CFR 10.9(b)

Mayumi Maeda	40,075
Charles L. Hamilton	42,624
Andrew V. Smith	43,132
Eric N. Hoover	37,355
Frank J. Mycroft	46,946
Robert M. McConnell	46,912
J. Thomas McCarthy	22,420
Joel G. Ackerman	24,307
Roger S. Sampson	44,314
Susan M. Schmitt	34,427
Edward B. Weller	37,468

書類送付先

Send Correspondence to:

Charles P. Sammut, Esq.
Limbach & Limbach L.L.P.
2001 Ferry Building
San Francisco, CA 94111-4262

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

直接電話連絡先： (名前及び電話番号)	Direct Telephone Calls to: (name and telephone number)
	Charles P. Sammut (415) 433-4150
唯一または第一発明者名	Full name of sole or first inventor:
	HARUO OBA
発明者の署名	Inventor's signature
日付	Date
住所	Residence
	Kanagawa, Japan
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, 141-0001 JAPAN
第二共同発明者名	Full name of second joint inventor, if any
	KEIICHI TOTSUKA
第二共同発明者の署名	Second Inventor's signature
日付	Date
住所	Residence
	Tokyo, Japan
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, 141-0001 JAPAN

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

第三共同発明者の署名	Full name of third joint inventor, if any
	JUNICHI REKIMOTO
第五共同発明者の署名	日付
	Third inventor's signature Date
住所	Residence
	Tokyo, Japan
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o SONY COMPUTER SCIENCE LABORATORY INC. 3-14-13 Higashi-Gotanda, Shinagawa-ku, Tokyo, 141-0001 JAPAN
第四共同発明者名	Full name of fourth joint inventor, if any
	NOBUYUKI MATSUSHITA
第四共同発明者の署名	日付
	Fourth inventor's signature Date
住所	Residence
	Kanagawa, Japan
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o SONY COMPUTER SCIENCE LABORATORY INC. 3-14-13 Higashi-Gotanda, Shinagawa-ku Tokyo, 141-0001 JAPAN

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

第五共同発明者名	Full name of fifth joint inventor, if any CHISATO NUMAOKA
第五共同発明者の署名 日付	Fifth inventor's signature Date
住所	Residence Kanagawa, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, 141-0001 JAPAN